
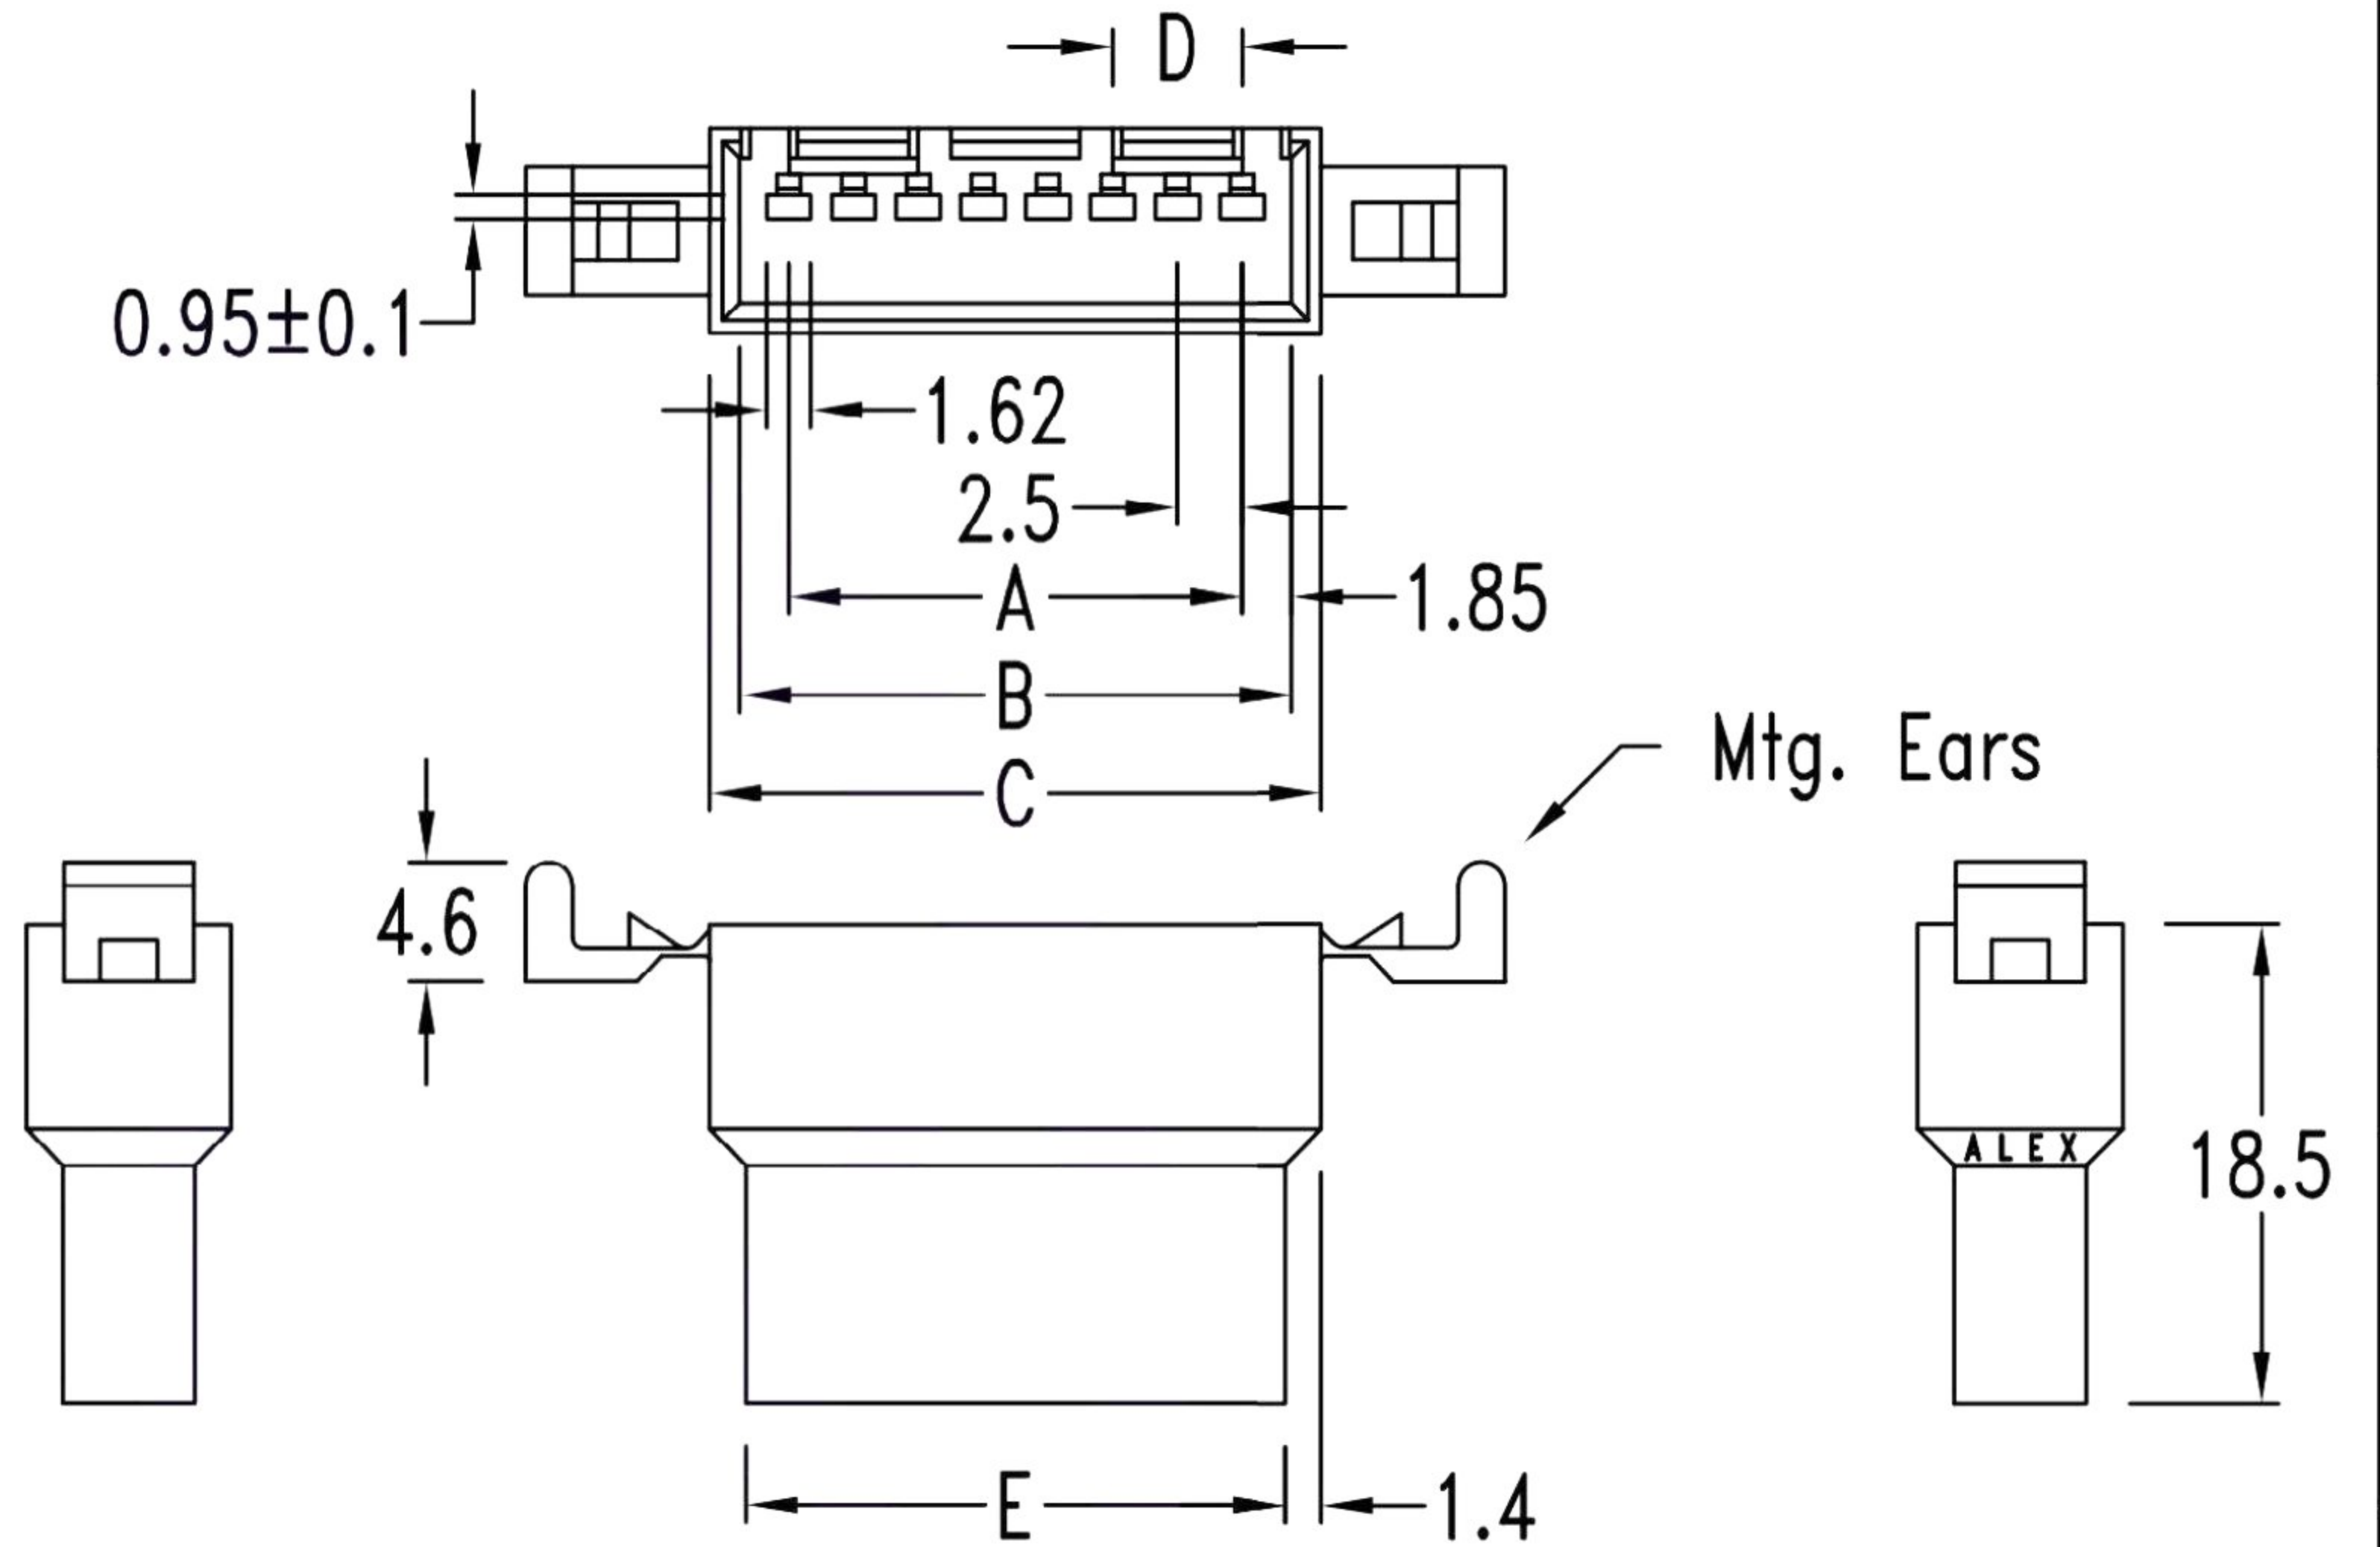


Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon 66

Specification:

- Current rating: 3A
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: 0°C ~ 105°C

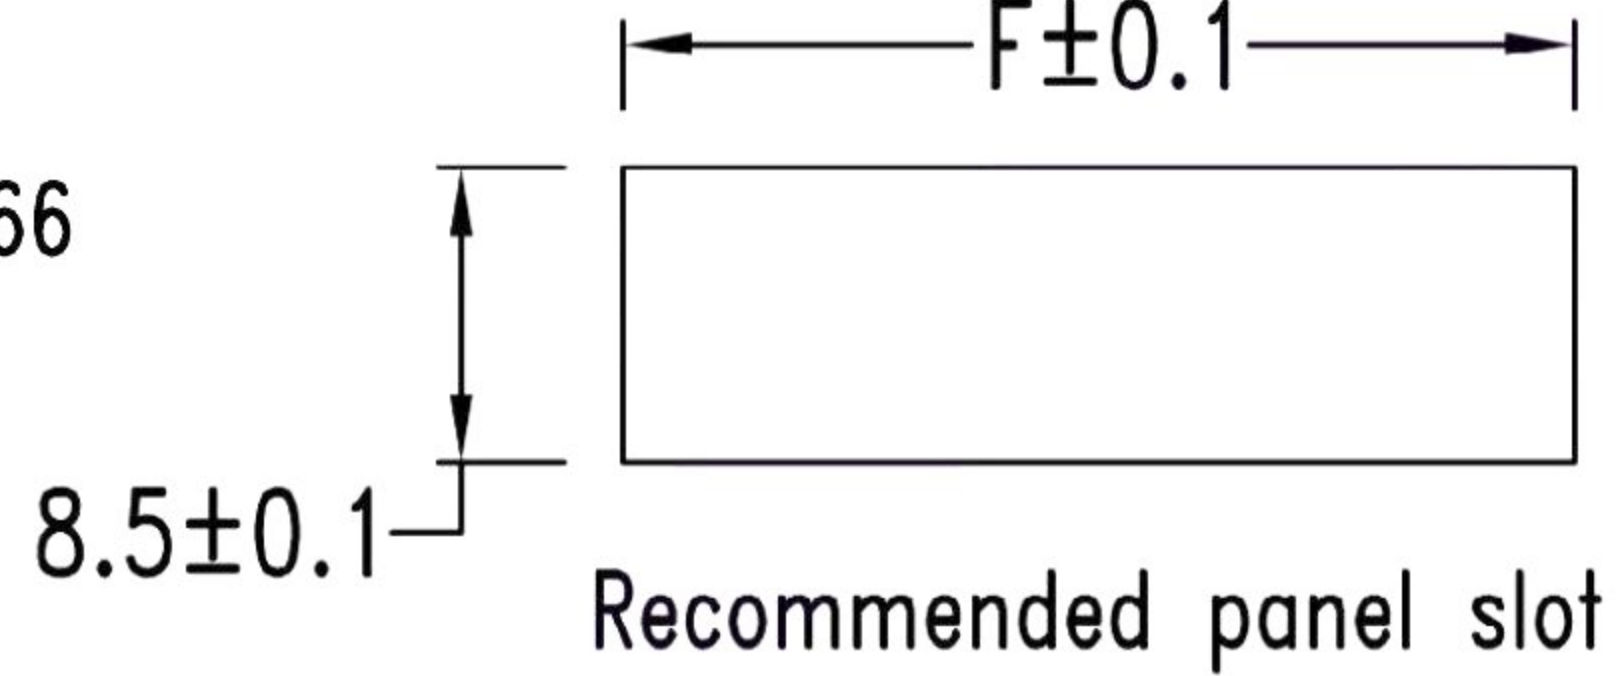


Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
2	2.5	6.2	8.6	2.5	5.8	12.4	8	17.5	21.2	23.6	5.0	20.8	27.4
3	5.0	8.7	11.1	5.0	8.3	14.9	9	20.0	23.7	26.1	5.0	23.3	29.9
4	7.5	11.2	13.6	7.5	10.8	17.4	10	22.5	26.2	28.6	5.0	25.8	32.4
5	10.0	13.7	16.1	3.7	13.3	19.9	11	25.0	28.7	31.1	5.0	28.3	34.9
6	12.5	16.2	18.6	5.0	15.8	22.4	12	27.5	31.2	33.6	5.0	30.8	37.4
7	15.0	18.7	21.1	5.0	18.3	24.9							

Ordering Information

Part No.	Feature
H2506-XXPRW000R	With Mtg. Ears
H2506-XXPNW000R	Without Mtg. Ears

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 HELEN</p>	 <p>TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.4</p>	<p>PART NAME 品名 MX 2.5mm HOUSING(FEMALE) WITH OR WITHOUT MOUNTING EARS 1XXXP WHITE INSULATOR ROHS</p>	
<p>DWG. 製圖 ABBY</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 MM</p>	<p>SIZE. 紙張尺寸 A4</p>
<p>DATE 制表日 2014/03/06</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版次 A</p>	<p>PART NO. 料號 H2506-XXP(N、R)W000R</p>