
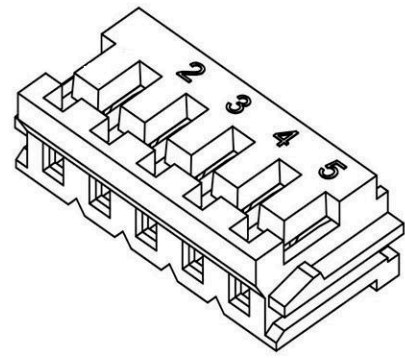


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H


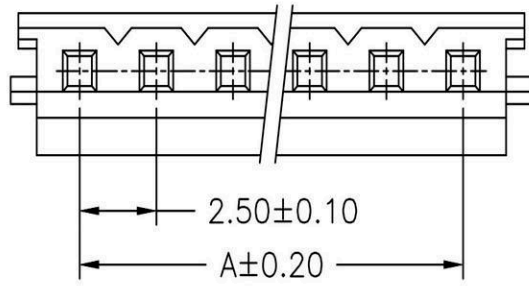


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

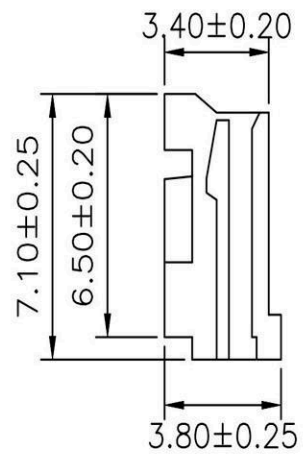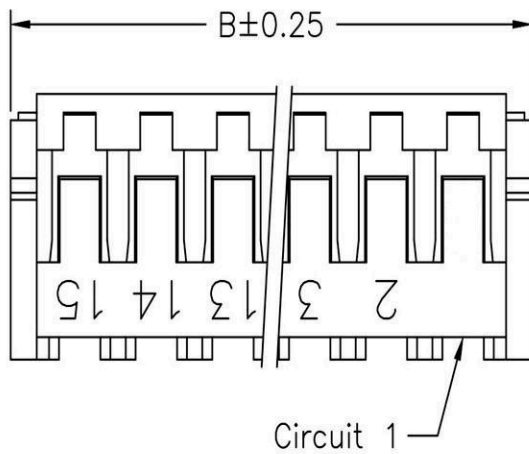

PART NO.	Dimensions	
	A	B
02P	2.50	7.00
03P	5.00	9.50
04P	7.50	12.00
05P	10.00	14.50
06P	12.50	17.00
07P	15.00	19.50
08P	17.50	22.00
09P	20.00	24.50
10P	22.50	27.00
11P	25.00	29.50
12P	27.50	32.00
13P	30.00	34.50
14P	32.50	37.00
15P	35.00	39.50

APPD. 核准 DWG. 製圖 <i>Helen</i> DATE 制表日 2015/5/29	RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
		TOLERANCE 容許公差 0 ± 0.2 .00 ± ANG ±	PART NAME 品名 2.5mm HOUSING XXP WHITE INSULATOR ROHS
UNIT 單位 MM	SCALE 比例 參考	SIZE 紙張尺寸 A4	PART NO. 料號 H2520-XXPW0000R
PAGE 張數 1 OF 1	REV. 版本 A		

1 2 3 4 5 6 7 8