
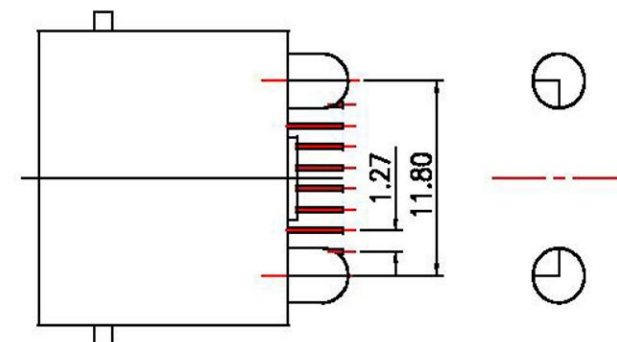
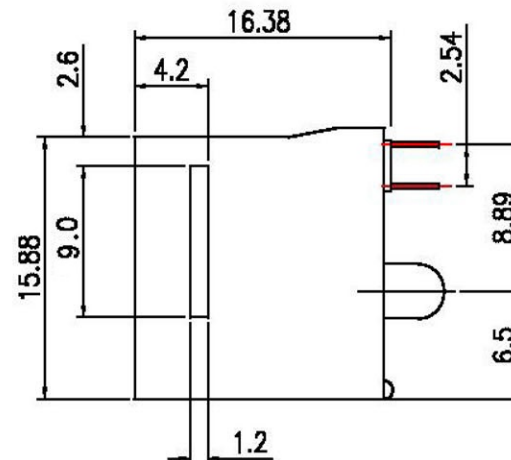


PCB Layout

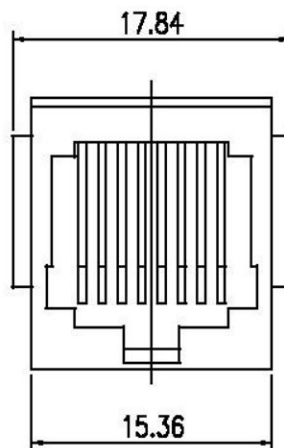

Materials

Housing: Glass filled Polyester UL94V-0, Black.
 Contact: 0.45mm Diameter Phosphor Bronze Gold Plating
 Over Nickel.

Electrical Characteristics:

Insulation Resistance: 500MΩ Min.
 Contact Resistance: 30mΩ Max.
 Withstand Voltage: 1000VAC 1minute.
 Current Rating: 1.5A

| | | | |
|-----------------------|---|--|--|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 |  | TOLERANCE 容許公差 | PART NAME 品名 |
| DWG. 製圖 | <i>Helen</i> | 0 ± 0.25 .00 ± 3° ANG. ± 3° | TOP ENTRY PCB JACK 8P8C W/PANEL STOP HALF ROUND FOOT BLACK COLOR ROHS |
| DATE 制表日 | 2019/8/28 | UNIT 單位 M M | PART NO. 料號 |
| | | PAGE 張數 1 OF 1 | C0052-88AHXB00R |