

PC BOARD LAYOUT

**MATERIALS AND FINISH**

HOUSING—PBT POLYESTER UL-94V-0 MIXED GLASS FIBER.

STANDARD COLOR FIBER.

CONTACT—0.45mm DIAMETER PHOS-BRONZE  
PLATED WITH HARD GOLD.

SHIELD:0.25mm THICK COPPER ALLOY PLATED WITH NICKEL.

**ELECTRICAL:**


1.CURRENT RATING: 1.5 AMP

2.VOLTAGE RATING: 150 VAC

3.CONTACT RESISTANCE: 20 MILLIOHMS MAX

4.INSULATION RESISTANCE: 500 MILLIOHMS MIN

5.DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC, 1MIN

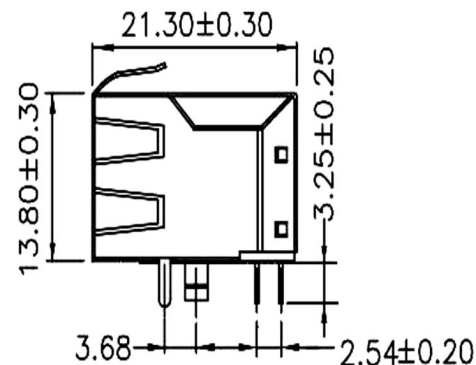

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准		容許公差 TOLERANCE .000 ±0.13 ANG±3° .00 ±0.25 .0 ±0.38	PART NAME 品名 SIDE ENTRY PCB JACK 10P8C GANG TYPE 4 JCAKS FULLY SHIELDED B TYPE (BEFOR FOOT 3.68mm) NICKEL SHELL ROUND PIN BLACK COLOR W/ 3 TABS(TOP SIDE) W/ 2 TABS(LEFT & RIGHT SIDE) W/ 2 METAL FOOT ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C0060-08DBXB05R
DATE 制表日	2016/01/13	UNIT 單位 M M	
		PAGE 張數 1 OF 1	
		REV. 版次 A	