
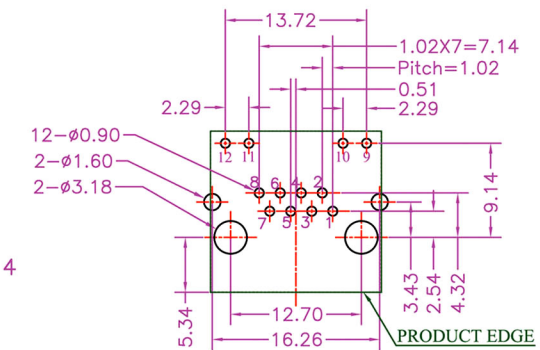


2. Material
- 2.1 Housing : PBT
  - 2.2 Terminal : 0.30±0.10mm Thickness Phosphor Bronze
  - 2.3 Shell : 0.25±0.10mm Thickness Brass.
3. Finish
- 3.1 Contact: AU On Contact Area(See Prat NO. u" )  
,Solder Area Sn 80u" Min,Nickel Plating 50u" Min.
  - 3.2 Shell : 50u" Min Nickel Plated Overall.

4. Specification:
- 4.1 Mating:AC 125V 1.5A.
  - 4.2 Contact resistance ≤60m Ω .  
After test: ≤60m Ω .
  - 4.3 Insulation resistance:(DC 500V)  
500M Ω .  
After test: ≥200M Ω .
  - 4.4 Withstanding voltage:500V AC.
  - 4.5 Mating force:25N Max.
  - 4.6 Life test:1000 cycles Min.
  - 4.7 Lead Soldering Temperature 220±5°

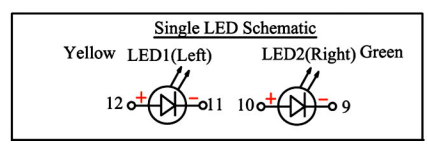

TOLERANCE: ±0.05 THICKNESS: 1.50~1.60mm  
RECOMMENDED PCB LAYOUT/ Top View

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 DWG. 製圖 DATE 制表日 2014/06/25	Hedy 1 / 1	TOLERANCE 容許公差 .000 ±0.15 ANG .00 ±0.30 .0±3" .0 ±0.50 .00±1"	PART NAME 品名 JACK 8P8C SKYLIGHT TYPE TOP TABS & SIDE TABS WITH LED (LEFT:YELLOW COLOR / RIGHT:GREEN COLOR)FLAT PIN SELECTIVE GOLD XU" PLATING BLACK INSULATOR ROHS PART NO. 料號 C0073-AAYXB000R
SCALE 比例 參考		UNIT 單位 MM	SIZE. 紙張尺寸 A 4
REV. 版次 A		PAGE 張數 1 / 1	