


1. Material
 - 1.1 Housing : PBT
 - 1.2 Terminal : 0.30±0.10mm Thickness Phosphor Bronze
 - 1.3 Shell : 0.25±0.10mm Thickness Brass.
2. Finish
 - 2.1 Contact: AU On Contact Area
,Solder Area Sn 80u" Min,Nickel Plating 50u" Min.
 - 2.2 Shell : 50u" Min Nickel Plated Overall.
3. Specification:
 - 3.1 Mating:AC 125V 1.5A.
 - 3.2 Contact resistance ≤60m Ω.
After test: ≤60m Ω.
 - 3.3 Insulation resistance:(DC 500V)
500M Ω.
After test: ≥200M Ω.
 - 3.4 Withstanding voltage:500V AC.
 - 3.5 Mating force:25N Max.
 - 3.6 Life test:1000 cycles Min.
 - 3.7 Lead Soldering Temperature 220±5°

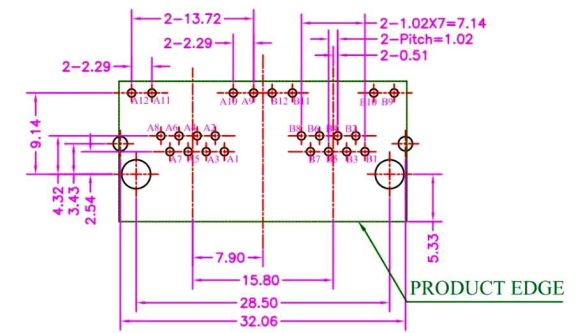


TOLERANCE: ±0.05 THICKNESS:1.5mm
RECOMMENDED PCB LAYOUT/ Top View

LED1(Left) LED3(Left) Green	LED2(Right) LED4(Right) Yellow
-----------------------------------	--------------------------------------

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

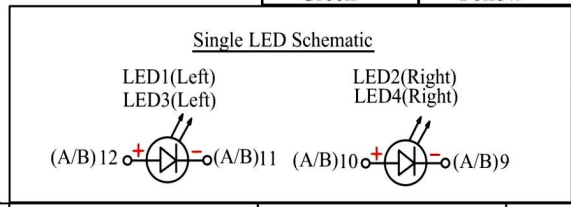

APPD. 核准 HELEN		TOLERANCE .000 ±0.15 .00 ±0.30 .0 ±0.50 ANG.0±3° .00±1°	PART NAME 品名 LED JACK 1X2PORT 8P8C WITH GREEN/YELLOW LED SKYLIGHT TYPE BLACK COLOR ROHS
DWG. 製圖 ABBY		SCALE 比例 參考	
DATE 制表日 2013/08/01	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 C0073-ABYXB000R
	PAGE 張數 1 OF 1	REV. 版次 A	