


TOLERANCE: ± 0.05 THICKNESS: 1.50~1.60mm
 RECOMMENDED PCB LAYOUT/ Top View

- 2. Material
 - 2.1 Housing : PBT
 - 2.2 Terminal : 0.30 ± 0.10 mm Thickness Phosphor Bronze
 - 2.3 Shell : 0.25 ± 0.10 mm Thickness Brass.
- 3. Finish
 - 3.1 Contact: AU On Contact Area(See Prat NO. u")
 ,Solder Area Sn 80u" Min,Nickel Plating 50u" Min.
 - 3.2 Shell : 50u" Min Nickel Plated Overall.

- 4. Specification:
 - 4.1 Mating: AC 125V 1.5A.
 - 4.2 Contact resistance $\leq 60m \Omega$.
 After test: $\leq 60m \Omega$.
 - 4.3 Insulation resistance: (DC 500V)
 500M Ω .
 After test: $\geq 200M \Omega$.
 - 4.4 Withstanding voltage: 500V AC.
 - 4.5 Mating force: 25N Max.
 - 4.6 Life test: 1000 cycles Min.
 - 4.7 Lead Soldering Temperature $220 \pm 5^\circ$

Single LED Schematic

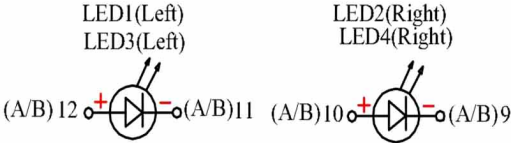

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		Tolerance $.000 \pm 0.15 \text{ ANG}$ $.00 \pm 0.30 .0 \pm 3'$ $.0 \pm 0.50 .00 \pm 1'$	PART NAME 品名 LED JACK 1X4 PORTS RJ45 8P8C WITH GREEN(LEFT)/YELLOW(RIGHT) LED SHIELDED SKYLIGHT TYPE BLACK COLOR ROHS
DWG. 製圖	Betty	SCALE 比例 參考	UNIT 單位 M M
DATE 制表日	2014/10/28	PAGE 張數 1 OF 1	REV. 版次 B
		PART NO. C0073-ADYXB000R 料號	