
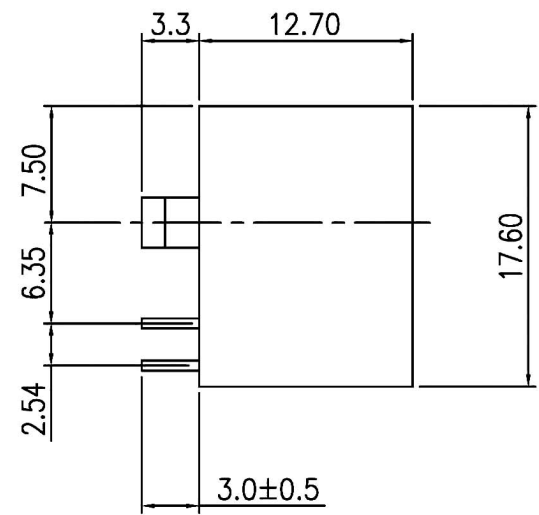
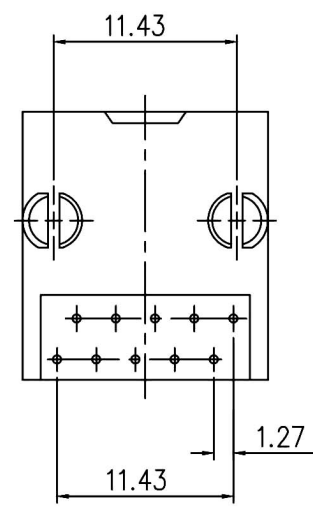


PCB Layout

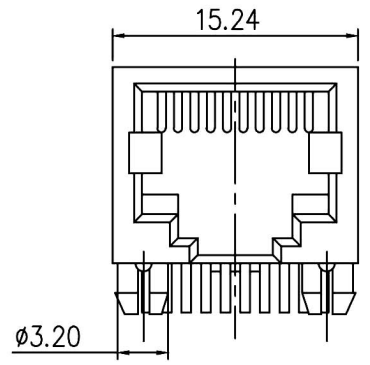

Materials

Housing: Glass Filled Polyester UL94V-0,Black
 Contact: 0.45mm Diameter Phosphor Bronze Gold Plating Over Nickel

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 500 VAC, 1min
6. Durability:750 Cycles.

General tolerance:±0.2mm General angle tolerance:±2°

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 HELEN</p>		<p>TOLERANCE 容許公差 .0 ± .00 ± ANG. ±</p>	<p>PART NAME 品名 SIDE ENTRY P.C.B. JACK 10PXXC WITHOUT SHIELDED H:12.5mm D:17.3mm ROUND PIN BLACK INSULATOR ROHS</p>
<p>DWG. 製圖 ABBY</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 MM</p>	<p>PART NO. 料號 C0083-0XXB0000R</p>
<p>DATE 製表日 2015/01/20</p>	<p>PAGE 張數 1 OF 1</p>	<p>SIZE 紙張尺寸 A 4</p>	<p>REV. 版次 D</p>