
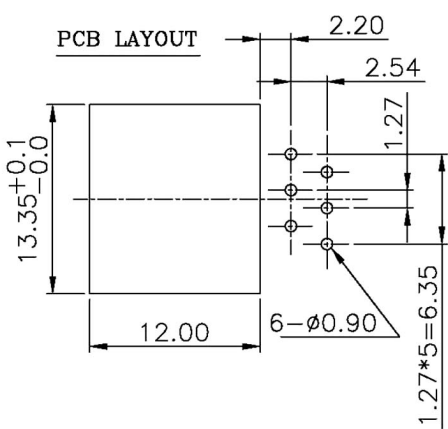
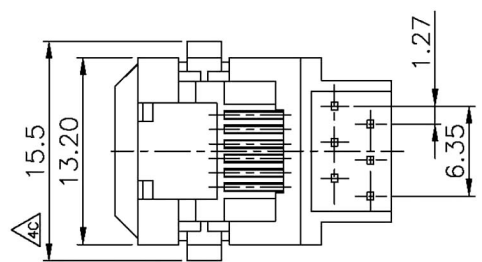



**MATERIALS:**  
**PLASTIC HOUSING:** HIGH TEMP. THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.  
**CONTACTS:** PHOSPHOR BRONZE  
**PLATING:** GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.

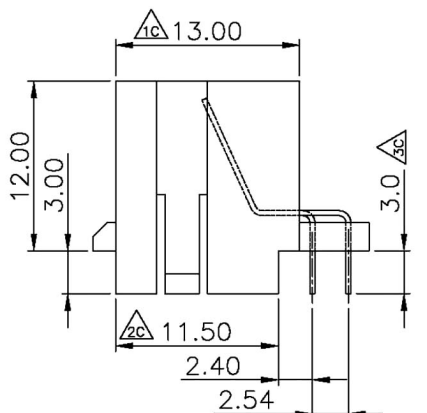

**ELECTRICAL:**  
 Current Rating: 0.4 Amps.  
 Voltage Rating: 50V DC.  
 Contact Resistance: 40 Megaohms Max.  
 Insulation Resistance: 500 Megaohms Min  
 Operating Temperature Range: 0°C~+70°C

RoHS COMPLIANT

APPD. 核准 Edward			<b>TOLERANCE</b> 容許公差 .0 ±0.38 .00 ±0.25 ANG. ±3°		<b>PART NAME</b> 品名 BOTTOM ENTRY PCB JACK 6P6C W/O SHIELDED BLACK INSULATOR ROHS
DWG. 製圖 Yumi			<b>SCALE</b> 比例 參考	<b>SIZE</b> 紙張尺寸 A 4	
DATE 制表日 2008/07/14		<b>UNIT</b> 單位 M M	<b>REV.</b> 版次 A	<b>PART NO.</b> 料號 C0084-66NXB000R	
		<b>PAGE</b> 張數 1 OF 1			

**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**