
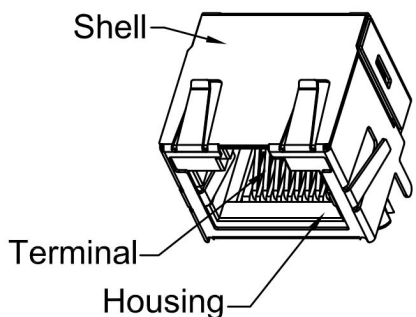


Electrical Characteristics :  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

Material:  
 Housing: Thermoplastic UL94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Copper Alloy  
 Plated With Gold And Tin In Solder Area.  
 Shell: Copper Alloy ,Nickel Plating

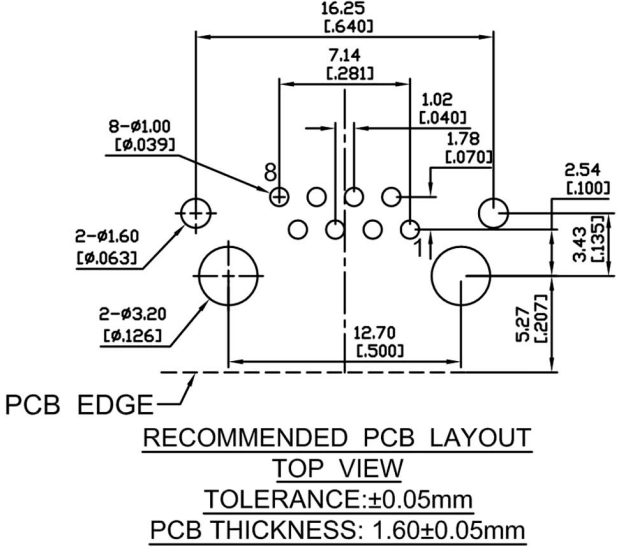

APPD. 核准			TOLERANCE(公差): 0.00 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NAME 品名	
DWG. 製圖				SIDE ENTRY PCB JACK 8P8C UP LATCH TYPE WITH SHIELDED FLAT PIN BLACK INSULATOR ROHS	
DATE 制表日		SCALE 比例	SIZE: 紙張尺寸	PART NO.	
2015/01/14		UNIT 單位	REV. 版次	料號	
Betty		M M	A 4	C0085-88YXB000R	
		PAGE 張數	1 OF 1		

RoHS Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**