
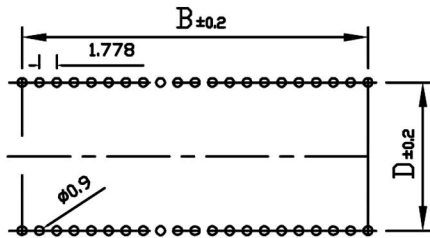
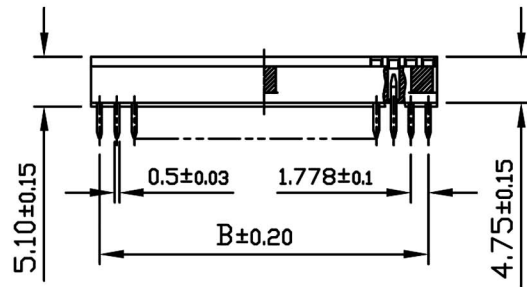


CKT	A±0.20	B±0.20	C±0.20	D±0.20
64	56.90	55.12	21.55	19.05

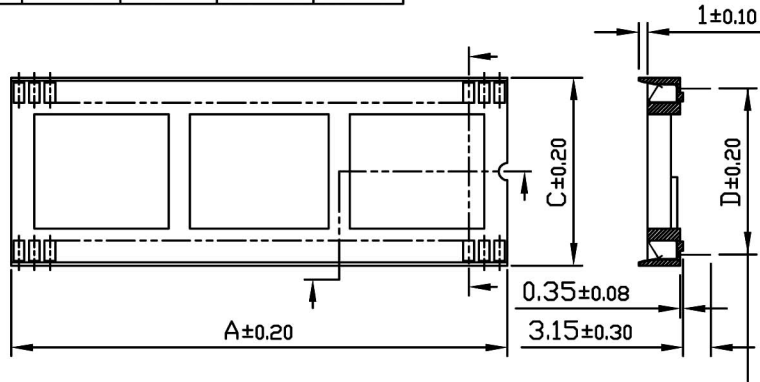

PCB LAYOUT

MATERIAL:

Contact:
phosphor Bronze thickness 0.17mm
Contact Plating: Sn-Cu plated 120u"~200u"
Insulator: PBT-4830 , UL 94V-0

SPECIFICATIONS:

Current Rating : 1A
Dielectric withstanding Voltage : 1000v RMS/minute
Insulator resistance : 5000 Megohms min.
Contact resistance : 20 milliohms initial
30 milliohms after test.
Operating temperatures : -55°c to 85°c
Insertion force : 340g (12 oz) max.per contact.
Withdrawal force : 80g (2.82 oz) min.per contact

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		.0 ± .00 ± ANG. ±	H.D. I.C. SOCKET 1.778mm 64P 0.75' WITH BAR TIN PLATING BLACK INSULATOR ROHS
DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	PART NO.
2015/07/14	M M	A 4	料號 C0103-64CYTB00R
	PAGE 張數	REV. 版次	
	1 / 1	A	