


No of contacts	Dim A	Dim B	No of contacts	Dim A	Dim B
1		2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.6

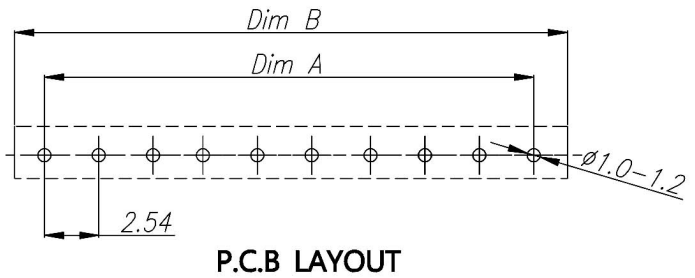

Technical Data:

Material:

Insulator body(housing):PPS(black/UL94-V0)
 Pin(outer sleeve):Brass,machined,CuZn38pb2
 Tin plated:80u"nickel,100~150u"Tin plated
 Clip(4 finger):Beryllium copper
 Gold plated:2um/80u"nickel/full Gold-flashed
Electrical

Current rating: 3 Amps /contact max
 Insulation resistance: > 1000 MΩ at V=100 V
 Operating: 60 Veff

Mechanical

Operating temperature:Gold plated: -55°C to +125°C
 Tin plated: -40°C to +105°C
 Soldering temperature: + 260° C 10s max

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 2.54mm SIP SOCKET MACHINED PIN 4 FINGERED CLIP 1XXXP PIN:TIN CLIP:GOLD PLATING WIRE WRAP PIN(17.75mm) ROHS
DWG. 製圖 ABBY		UNIT 單位 M M	
DATE 制表日 2014/12/23	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C0112-XXSACB00R

SCALE 比例 参考	TOLERANCE 容許公差 0 ± .00 ± ANG ±
UNIT 單位 M M	SIZE 紙張尺寸 A 4
PAGE 張數 1 OF 1	REV. 版次 A

PART NAME 品名 2.54mm SIP SOCKET MACHINED PIN 4 FINGERED CLIP 1XXXP PIN:TIN CLIP:GOLD PLATING WIRE WRAP PIN(17.75mm) ROHS
PART NO. 料號 C0112-XXSACB00R