


MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELDED: BRASS WITH NICKEL PLATED

PCB LAYOUT/TOP VIEW

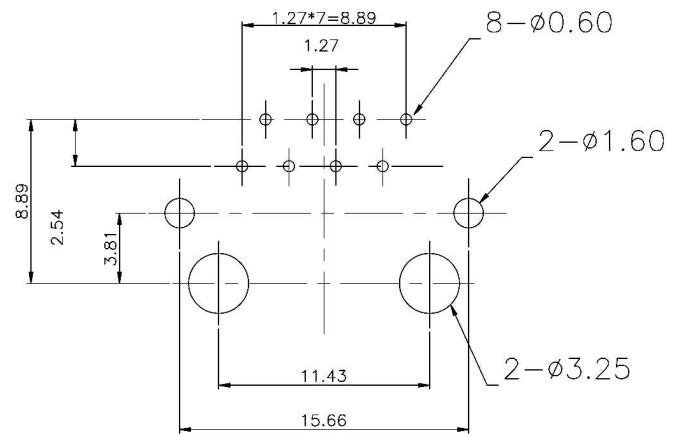

Electrical:
 Current Rating: 1.5A@25°C ambient.
 Voltage Rating: 125VAC.
 Contact Resistance: <40mΩ
 Insulation Resistance >500MΩ
 Operating Temperature: 0°C to +70°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名 TOP ENTRY PCB JACK 8P8C PRESS FIT TYPE WITHOUT PANEL STOP FULLY SHIELDED D TYPE (BEHIND PEG 3.81mm) FLAT PIN SELECTIVE GOLD 6U" PLATING BLACK COLOR ROHS
DWG. 製圖 ABBY		SIZE. 紙張尺寸 A 4	
DATE 制表日 2013/07/26	UNIT 單位 M M	REV. 版次 B	PART NO. 料號 C0230-88DEQB00R
	PAGE 張數 1 OF 1		