


DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4

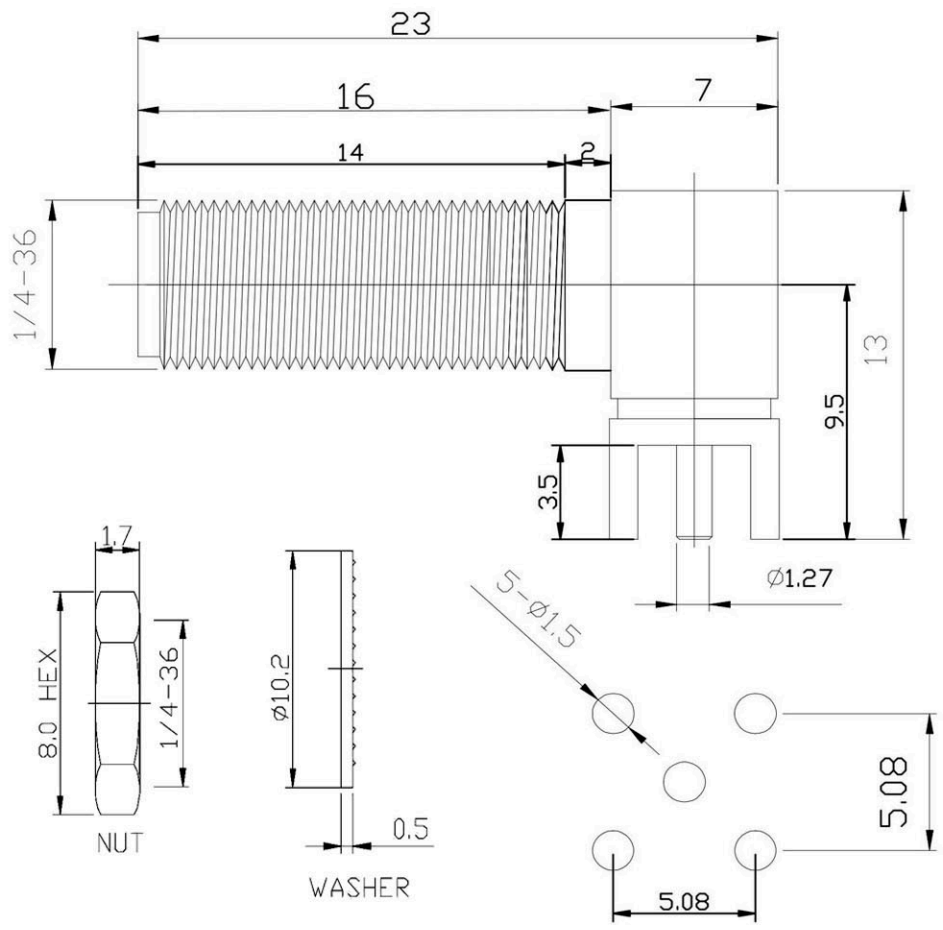

- 1.Mating: 1/4-36 UNS Thread coupling
- 2.Durability: 500 cycles
- 3.Temperature range : -55°C±155°C
- 4.Temperature : 50ohm
- 5.Frequency : 0-6 GHZ max
6. VSWR: 1.6max
7. Working voltage : 335 Volts rms
8. Dielectric withstanding voltage : 500 Volts rms
9. Insulation resistance: 5000 MΩ min
- 10.Contact resistance: center conductor 3.0 mΩ

7	NUT	BRASS	GOLD	1
6	WESHER	STEEL	GOLD	1
5	DIELECTRIC	TEFLON	NONE	1
4	DIELECTRIC	TEFLON	NONE	1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

<b>RoHS</b> Compliant	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
	APPD. 核准 Betty DWG. 製圖 Lena DATE 制表日 2019/6/25	 SCALE 比例 参考 UNIT 單位 MM PAGE 張數 1 OF 1
PART NAME 品名 RF CONNECTOR-SMA JACK FEMALE RIGHT ANGLE TYPE LONG BODY 50ohms BODY:BRASS/ GOLD FLASHPIN:GOLD FLASH PLATED WITH WASHFER & NUT ROHS		
PART NO. 料號 C0410-RJRABGY0R		