


RECOMMENDED PCB LAYOUT

**NOTE**

**MATERIAL**  
 BODY&LATCH: NY66 RATED.  
 CONTACTS: PHOSPHOR BRONZE  
 SHELL:ZINC ALLOY  
 RIVET:BRASS  
 CONTACT PLATING: GOLD PLATING OVER NICKEL  
**ELECTRICAL SPECIFICATION**  
 CURRENT RATING: 1.5A;  
 VOLTAGE RATING: 40V;  
 CONTACT RESISTANCE: 30mΩ MAX.  
 INSULATION RESISTANCE:1000MΩ MIN 500V DC.  
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC  
**ENVIRONMENTAL**  
 OPERATING TEMPERATURE: -20°C~80°C.

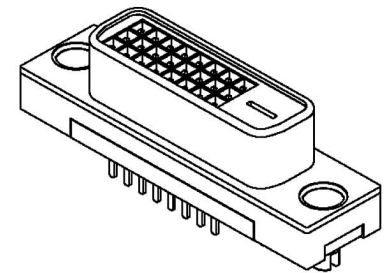

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY		TOLERANCE XX ±0.25 XX ±0.5 XXX ±0.20 XXX ±1 XXXX ±0.10 XXXX ±0.5
DWG. 製圖	BETTY		SCALE 比例 參考
DATE 2008/09/16	制表日	UNIT 單位	M M
		PAGE 張數	1 OF 1
		REV. 版次	A
		PART NAME 品名	DVI CONNECTOR DIGITAL 24+1P FEMALE STRAIGHT TYPE W/O SCREWS WHITE INSULATOR ROHS LOW-LEAD
		PART NO. 料號	C0507-24FSAXW0R