

A

B

C

D

E

F

G

H

A

B

C



D

E

F

G

H


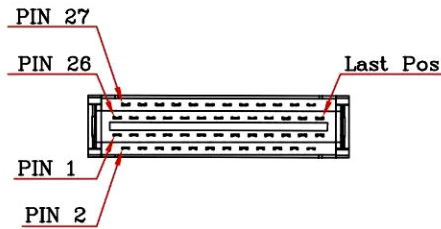



● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic P.B.T UL94V-0 Black  
 Contacts: Phosphor Bronze Gold Selective Plated  
 Front Shell: Steel Nickel Plated Over Copper


● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +85°C



● MATERIALS: (RoHS Compliant)

Hood: Plastic Thermoplastic PBT UL 94V-0  
 Latch & Hood: Plastic Thermoplastic PBT UL 94V-0  
 Latch: Stainless Steel  
 Jackscrews: Steel Nickel Plated Over Copper  
 Hex Nuts: Steel Nickel Plated Over Copper  
 Cable Clipper: Steel Nickel Plated Over Copper  
 Screws: Steel Nickel Plated Over Copper



RoHS Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准 BETTY  
 DWG. 製圖 KAREN  
 DATE 制表日 2015/09/02

SCALE 比例 參考  
 UNIT 單位 MM  
 PAGE 張數 1 OF 1

TOLERANCE 容許公差  
 .0 ±  
 .00 ±  
 ANG. ±

SIZE. 紙張尺寸 A4  
 REV. 版本 A

PART NAME 品名  
 1.27mm SCSI II CEN. SOLDER CONNECTOR 50P MALE FISH HOOK SPRING LATCHES(STAINLESS STEEL T=0.3mm ENTRY HOLE SIZE:φ12mm HOOD:BLACK COLOR ROHS)

PART NO. 料號 C0510-50MKLXB0R

1

2

3

4

5

6

7

8