
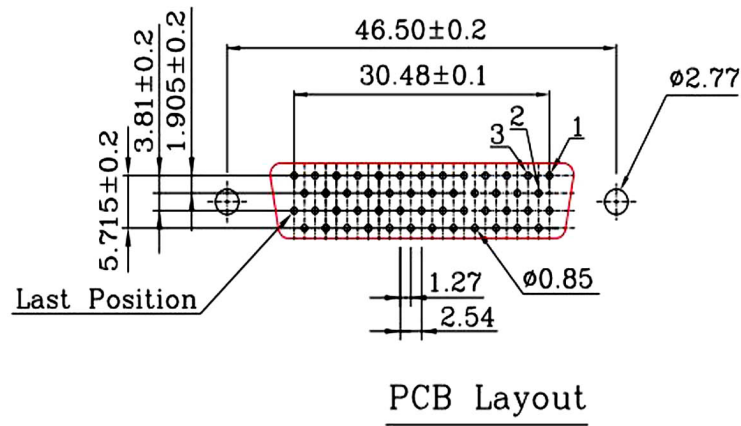


● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated
 Bracket: Zinc Alloy Nickel Plated
 Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

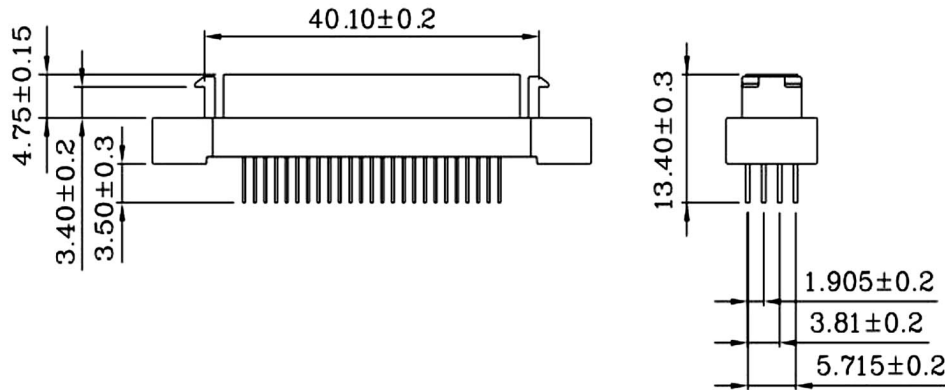

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Betty	SCALE 比例 參考	SCSI-II CENTRONIC PCB 180° 1.27mm 50P FEMALE THREAD INSERT M2.6 UNC W/FRONT LATCH METAL SHELL SELECTIVE GOLD 5U" PLATING STANDARD TYPE BLACK INSULATOR ROHS
DATE 制表日	2016/05/19	UNIT 單位 M M	PART NO.
		PAGE 張數 1 OF 1	料號 C0511-50FADEB1R
		REV. 版次 A	