
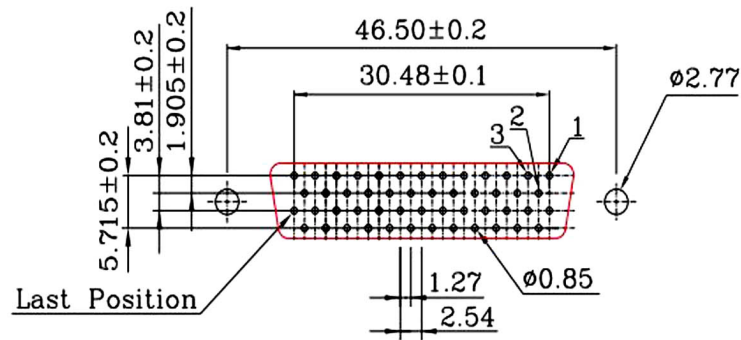
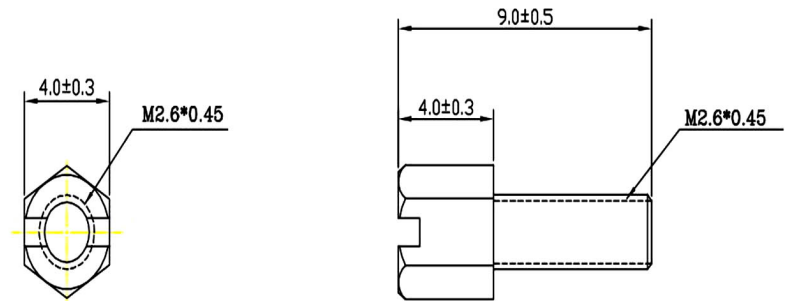


● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Bracket: Zinc Alloy Nickel Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

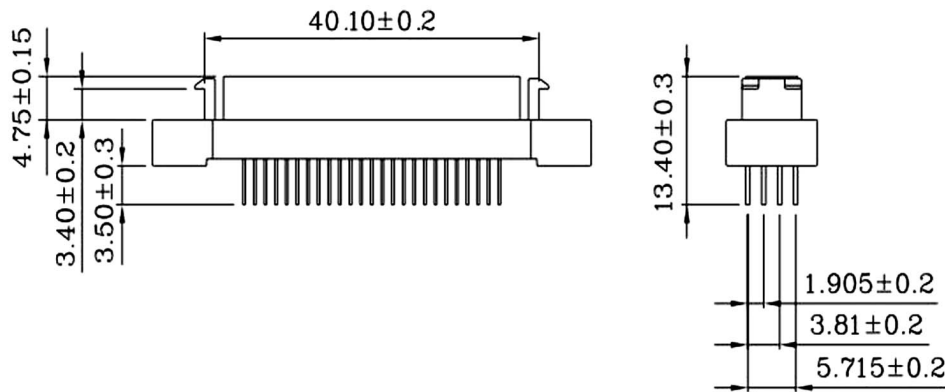

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE. 紙張尺寸	SCSI-II CENTRONIC PCB 180° 1.27mm 50P FEMALE
DATE 制表日	PAGE 張數	REV. 版次	M2.6 UNC W/Front LATCH METAL SHELL ADD M2.6UNC HEX SCREWS(4*9mm) SELECTIVE GOLD 5U" PLATING STANDARD TYPE BLACK INSULATOR
2016/05/19	1 OF 1	A	PART NO. 料號
Betty		A	C0511-50FAGEB1R