


● MATERIALS: (RoHS Compliant)



Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

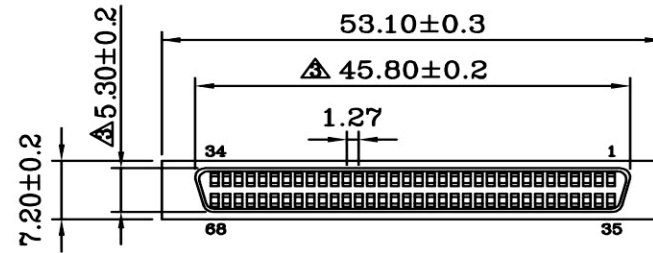

Long

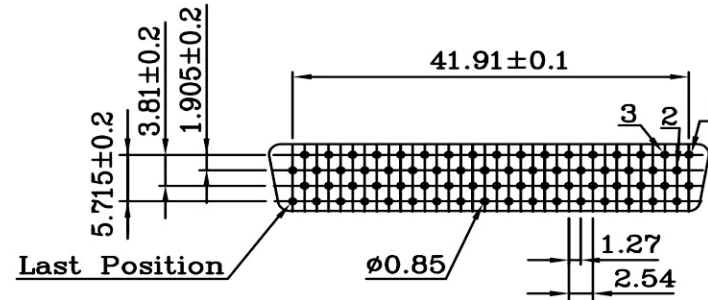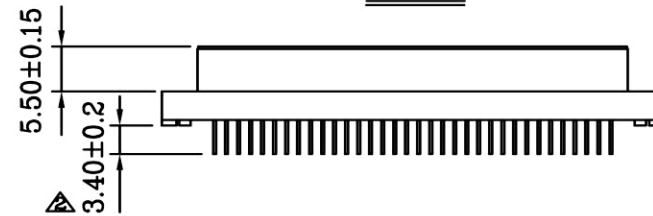

PCB Layout (B)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SCALE 比例	SCSI-II D-SUB PCB 180° 1.27mm 68F W/O FRONT LATCH ALL PLASTIC NO THROUGH HOLE SELECTIVE GOLD 5U" PLATING STANDARD TYPE BLACK INSULATOR ROHS
DATE 制表日	PAGE 張數	SIZE 紙張尺寸	PART NO.
2015/4/23	1 OF 1	A4	料號 C0518-68FCNEB1R
Helen		REV. 版本	
		A	