

● **MATERIALS: (RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic  
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold  
Selective Plated

● **ELECTRICAL CHARACTERISTICS:**





Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

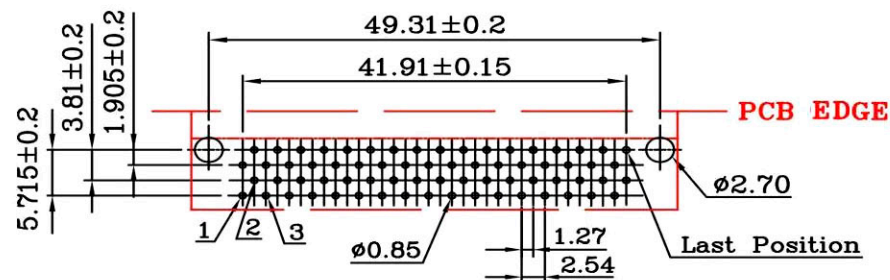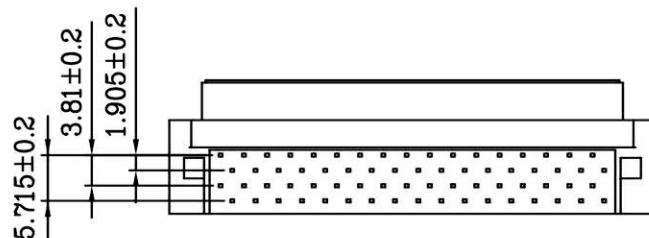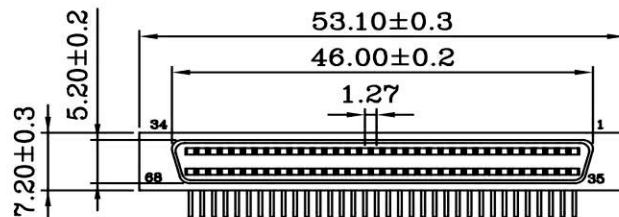

PCB Layout (REVERSE)

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 零件公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	SCSI-II D-SUB PCB 90° 1.27mm 68P FEMALE ALL PLASTIC WITHOUT SCREW HOLE WITHOUT FRONT LATCH WITHOUT BOARDLOCK SELECTIVE GOLD 5U" PLATING BLACK ROHS
DATE 制表日	PAGE 張數	REV. 版本	PART NO. 料號
2014/7/31	1 OF 1	A	C0519-68FD00EB0R

A

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8