

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C



D

E




F

G


H

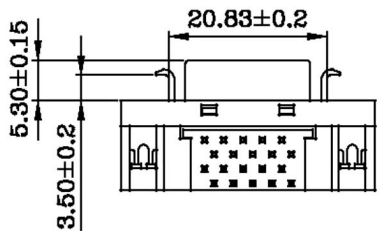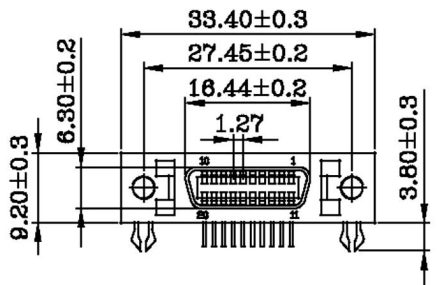

LATCH BRACKET

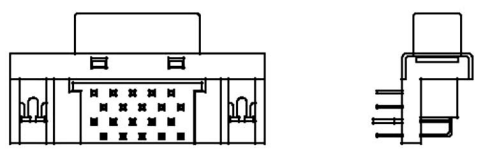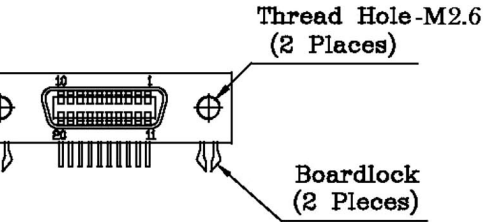

SCREW BRACKET

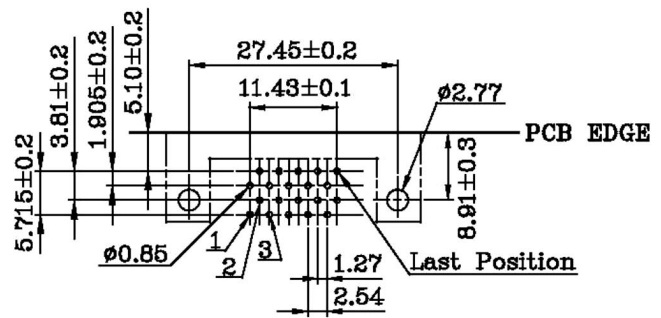

PCB Layout

• MATERIALS:(RoHS Compliant)

- Housing And Cover: Plastic Thermoplastic P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold Selective Plated
- Front Shell: Steel Nickel Plated Over Copper
- Bracket: Steel Nickel Plated Over Copper
- Boardlock: Brass Tin Plated Over Copper

• ELECTRICAL CHARACTERISTICS:

- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +105°C

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	SCALE 比例 参考	TOLERANCE 容許公差 0 ± .00 ± ANG. ±	PART NAME 品名 SCSI-II CN PCB 90□1.27mm 20P FEMALE THREAD INSERT M2.6 UNC W/Front LATCH METAL SHELL W/BOARDLOCK SELECTIVE GOLD 5U" PLATING BLACK COLOR ROHS
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C0520-20FAZDEBR
DATE 制表日 2018/04/12	PAGE 張數 1 OF 1	REV. 版次 B	

1 2 3 4 5 6 7 8