


● **MATERIALS: (RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated 5u"
Front Shell: Steel Nickel Plated
Over Copper
Bracket: Steel Nickel Plated
Over Copper
Boardlock: Brass Tin Plated
Over Copper


● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

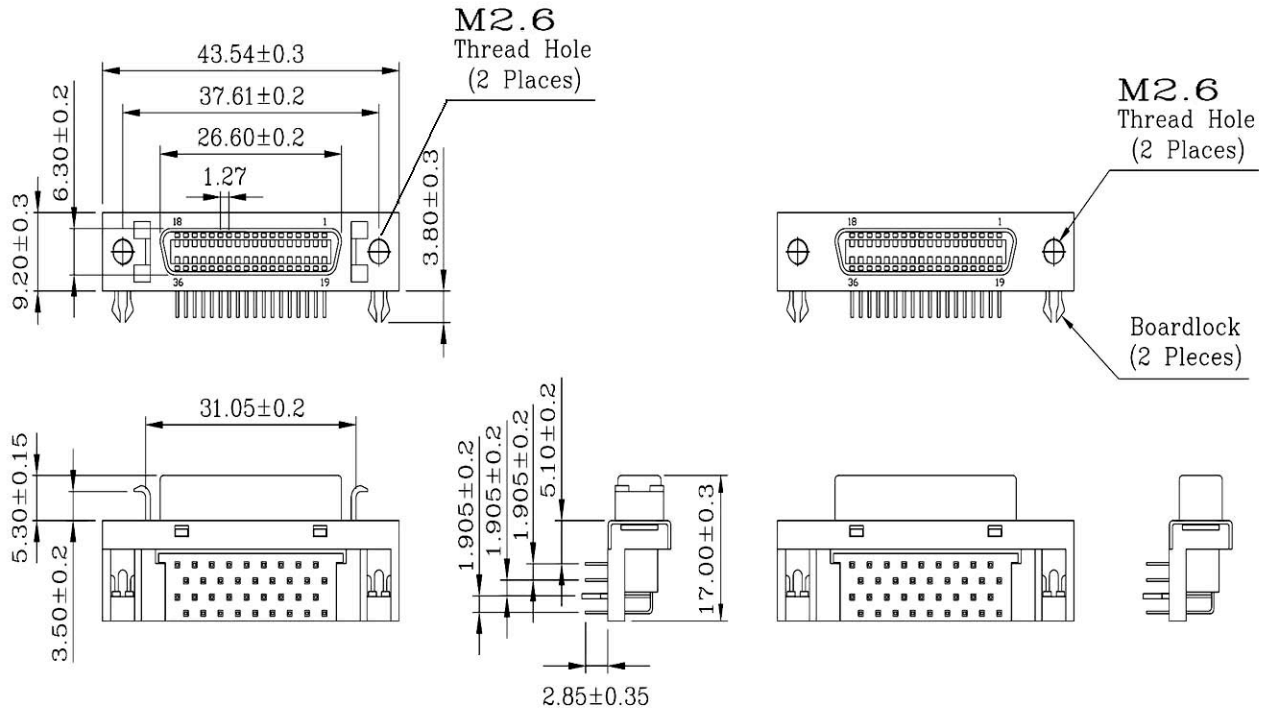

CATCH BRACKET

SCREW BRACKET

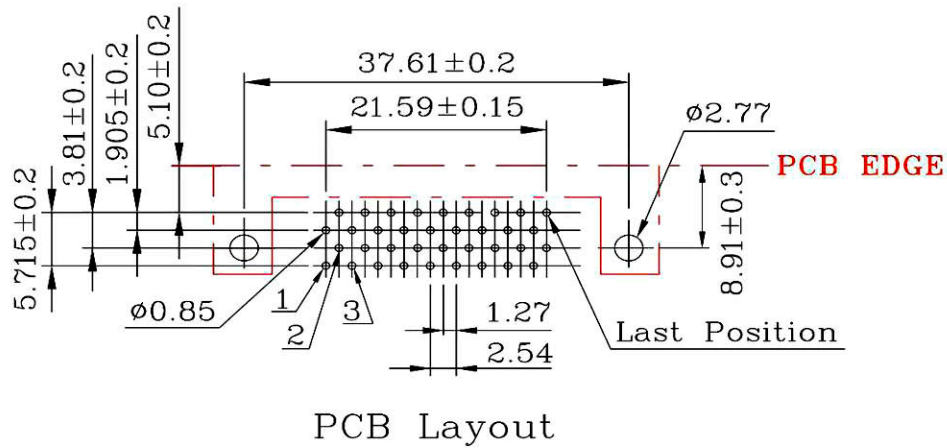

PCB Layout

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Helen	0 ± .00 ± ANG ±	SCSI-II CN PCB 90° 1.27mm 36P FEMALE THREAD INSERT M2.6 UNC WITH FRONT LATCH METAL SHELL WITH BOARDLOCK SELECTIVE GOLD 5U" PLATING BLACK COLOR ROHS
DATE 制表日	UNIT 單位	SIZE 紙張尺寸	PART NO.
2014/8/4	M M	A 4	C0520-36FAZDEBR
PAGE 張數	REV. 版本	1 OF 1	料號