


C0520-68FAZDEBR

C0520-68FBZDEBR

● MATERIALS: (RoHS Compliant)

- Housing And Cover: Plastic Thermoplastic P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold Selective Plated
- Front Shell: Steel Nickel Plated Over Copper
- Bracket: Steel Nickel Plated Over Copper
- Boardlock: Brass Tin Plated Over Copper

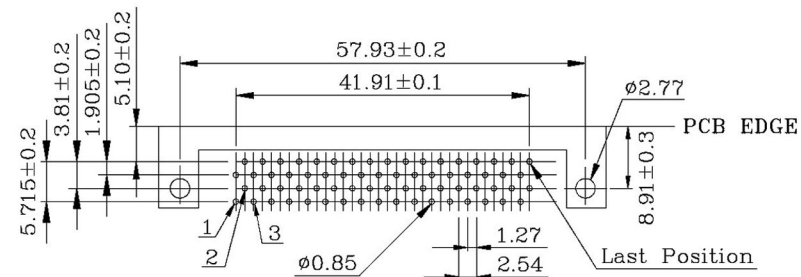

PCB Layout

● ELECTRICAL CHARACTERISTICS:

- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +85°C

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 SCSI-II CN PCB 90° 1.27mm 68P FEMALE THREAD INSERT M2.6 UNC W/FRONT LATCH OR W/O FRONT LATCH METAL SHELL W/BOARDLOCK SELECTIVE GOLD 5U" PLATING BLACK COLOR ROHS
DWG. 製圖	Hedy	SCALE 比例 參考	PART NO. 料號
DATE 制表日	2019/10/21	UNIT 單位 MM	C0520-68FXZDEBR
		PAGE 張數 1 / 1	
		REV. 版次 B	