


RECOMMENDED P.C.B. LAYOUT

MATERIAL  
 HOUSING : HIGH TEMPERATURE HOUSING  
 LCP (UL94V-0)WITHSTANDS IR AND  
 VPR SOLDERING METHODS.  
 CONTACTS : PHOSPHOR BRONZE.  
 PLATING : SELECTIVE GOLD PLATED.  
 SHELL : SPCC

SPECIFICATION  
 CURRENT RATING : 1AMP.  
 INSULATOR RESISTANCE 5000MΩ MIN. AT DC 500V.  
 CONTACT RESISTANCE : 20MΩ MAX. AT DC 100mA.  
 OPERATING TEMPERATURE : -65°C~+125°C.  
 MAX PROCESSING TEMPERATURE: 260±10°C FOR 3~5 SECONDS.

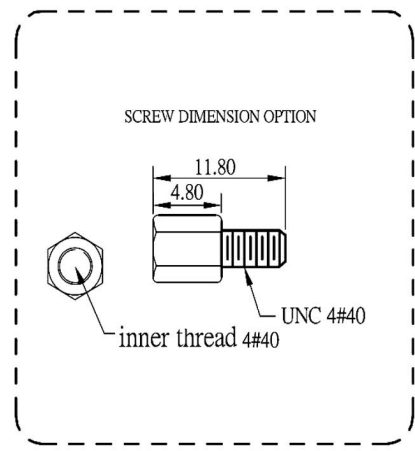

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE .0±0.30 .00±0.20 .000±0.050 .0000±0.0000 ANG.±3°	PART NAME 品名 D-SUB PCB HD RIGHT ANGLE FOR NOTBOOK 15P FEMALE SMT TYPE RIVET 4-40UNC THREAD WITH BOARDLOCK FIX SCREWS(4.8*11.8mm) POST ROW:15.98mm NICKEL SHELL BLACK INSULATOR MATERIAL:LCP ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C0524-15FICNXXBN
DATE 制表日	2017/10/31	UNIT 單位 M M	
		PAGE 張數 1 OF 1	
		REV. 版次 A	