


Recommended PCB Layout

1. Material:

Contact: Copper Alloy
 Insulator: LCP, UL94V-0, Black
 Shell: SPCC
 Harpoon: Copper Alloy.
 Rivet: Copper Alloy.
 Screw: Brass

2. Specification:

Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V At Sea Level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

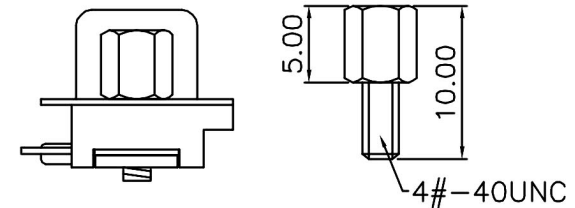

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		GENERAL TOLERANCE: X ±0.30 Ang. ±3° XX ±0.20 XXX ±0.05	PART NAME 品名 D-SUB PCB HD RIGHT ANGLE FOR NOTBOOK 15P FEMALE SMT TYPE RIVET 4-40UNC THREAD WITH BOARDLOCK FIX SCREWS (5.0*10.0mm) POST ROW: 15.98mm(16mm) NICKEL SHELL BLACK INSULATOR ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C0524-15FIGNXBR
DATE 制表日	2018/03/16	UNIT 單位 MM	
		PAGE 張數 1 OF 1	
		REV. 版次 A	