
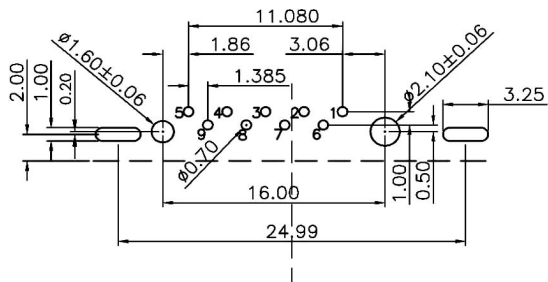
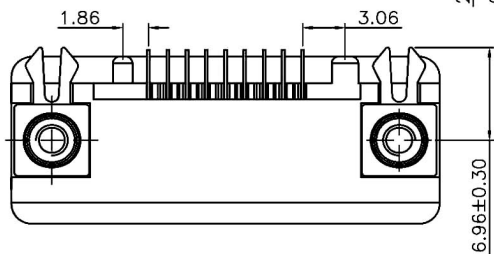



NOTE
 MATERIAL
 INSULATOR: PBT,UL 94V-0 RATED
 CONTACTS: BRASS
 SHELL: COLD ROLLER STEEL
 SCREW:BRASS PLATED NICKEL
 CONTACT PLATING: GOLD PLATING OVER NICKEL
 ELECTRICAL SPECIFICATION
 CURRENT RATING: 3AMP;
 CONTACT RESISTANCE: 25mΩ MAX.
 INSULATION RESISTANCE:5000MΩ MIN 500V DC.
 DIELECTRIC WITHSTANDING VOLTAGE:1000V AC
 ENVIRONMENTAL
 OPERRATING TEMPERATURE: -55°C~105°C.

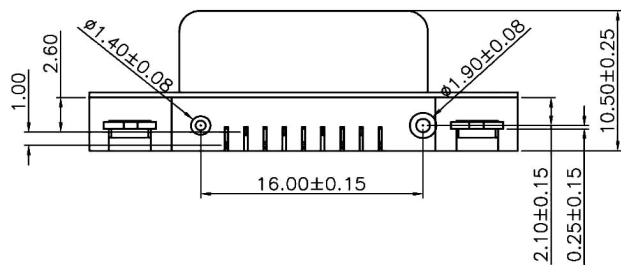

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE X. ±0.38 X.X' ±1' X.X ±0.35 X.XX' ±0.05' X.XX ±0.25 X.XXX ±0.10	PART NAME 品名 D-SUB R/A FOR NOTE BOOK-9F W/O SCREWS NICKEL SHELL BLACK COLOR (DUAL ROWS) ROHS
DWG. 製圖	Betty	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	PART NO. 料號 C0528-09FBANXBR
DATE 制表日	2015/06/15	REV. 版次 A	