


MATERIAL:

Insulator: PBT+30% Glass Fiber
UL94V-0
Pin contacts: Brass or Phosphor Bronze
Gold Plated & Tin plated
Shell: Steel, SPCC
Nickel & Tin Plated

ELECTRICAL DATA:

Rated Voltage: 350V AC
Rated Current: 5A
Withstand Voltage: 500V AC(RMS)
Insulation Resistance: Over 1000MΩ
Contact Resistance: 5MΩ AT 1A
Temperature: -40°C ~ +100°C

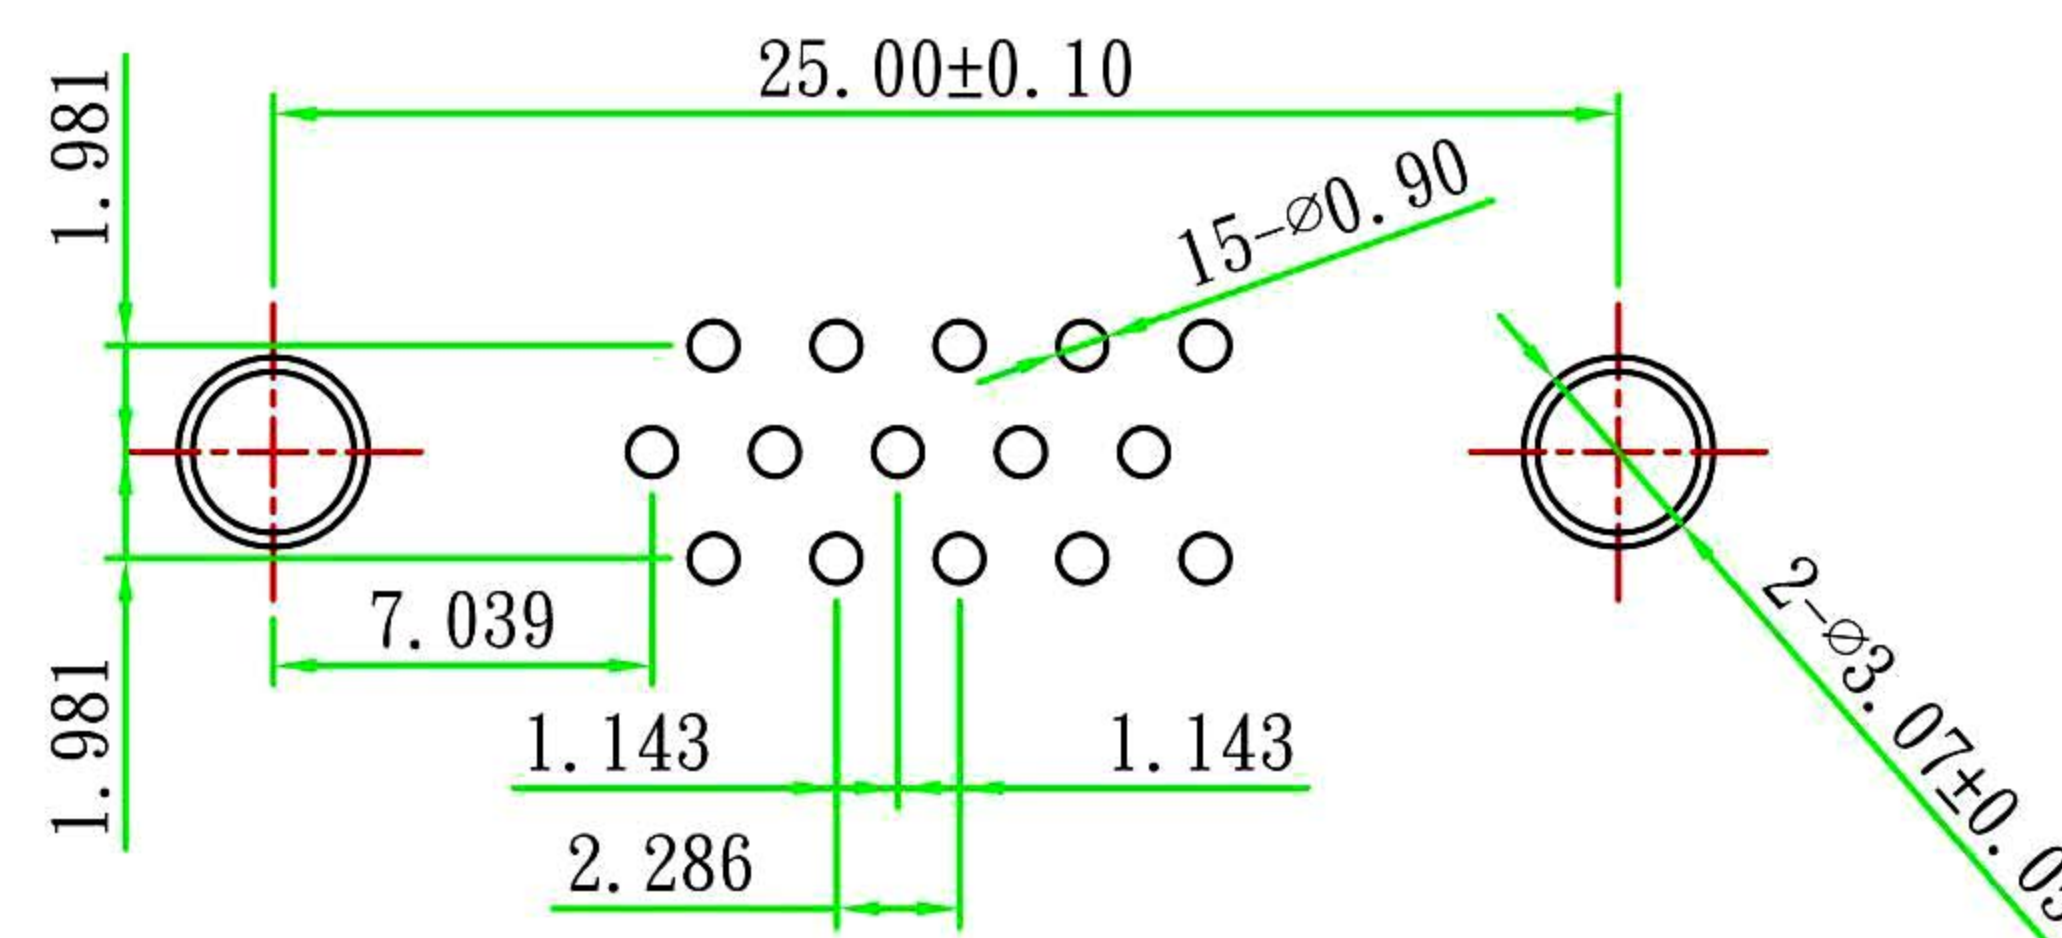

P. C. BOARD LAYOUT

公差 序号 尺寸	A±0.13	B±0.10	C±0.13	D±0.13	E±0.13
15P	30.80	25.00	16.90	8.30	12.50
26P	39.20	33.30	25.25	8.30	12.50
44P	53.05	47.05	38.95	8.30	12.50
62P	69.40	63.50	55.40	8.30	12.50

**RoHS
Compliant**

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.		TOLERANCE	PART NAME 品名
DWG.	参考	.0 ± .00 ± ANG. ±	
DATE	UNIT	SIZE.	PART NO.
2014/12/18	M M	A 4	
	PAGE	REV.	料 號
	1 OF 1	B	C0561-XXMIG(A, B)XXR

H. D. D-SUB PCB STRAIGHT STAMPED PIN XXP MALE REAR
RIVET 6mm BOARDLOCK (TIN or NICKEL) SHELL+DIMPLE ROHS