

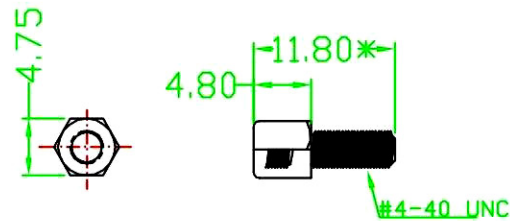


- . MATERIAL:
- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
 - 2.Contact:Brass
 - 3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
 - 4.Shell:Steel,Nickel Plated
- . SPECIFICATION:
- 1.Current Rating:5 AMPS
 - 2.Insulation Resistance: 5000M Ω , MIN. At 500VDC
 - 3.Dielectric Strength: 500V for One minute
 - 4.Operation Temperature: -55 $^{\circ}$ C~+105 $^{\circ}$ C.

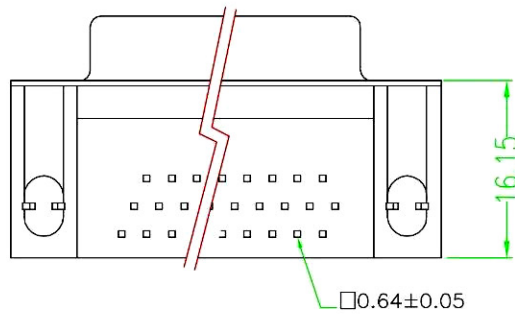

PINS	DIM	A±0.30	B±0.30	C±0.30	D±0.10
15		30.80	24.99	16.30	2.29
26		39.20	33.30	24.60	2.29
44		53.10	47.04	38.30	2.29
62		69.34	63.50	54.80	2.41

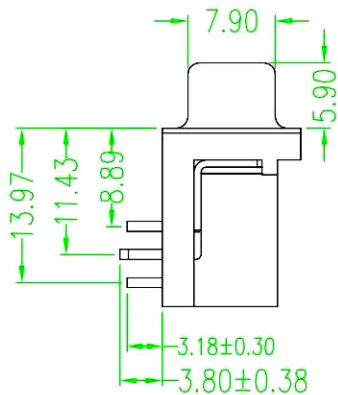

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOI FRANCE .0±0.25 0'±1.0' .00±0.20 .00'±0.5' .000±0.05 .000'±0.1'	PART NAME 品名 HIGH DENSITY D-SUB PCB RIGHT ANGLE STAMPED PIN XXP FEMALE RIVET W/ BOARDLOCK ADD 4.8X 11.8mm SCREWS NICKEL SHELL BLACK INSULATOR ROHS
DWG. 製圖 KAREN	SCALE 比例 參 考	UNIT 單位 M M	PART NO. C0562-XXFBBNXBR
DATE 制表日 2015/07/20	PAGE 張數 1 OF 1	SIZE 線規尺寸 A 4	料 號 C0562-XXFBBNXBR