


MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
 BACK SHELL NICKEL FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR
 HIGH POWER CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING : 10, 20, 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 1.0 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -55°C ~ +155°C

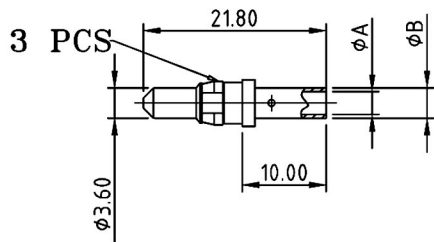

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 X ±0.20 Ang ±2' XX ±0.25 XXX ±0.50	PART NAME 品名 D-SUB COAXIAL POWER PIN CRIMP TYPE 8W8 MALE 20Amps THROUGH HOLE NICKEL SHELL POWER CONTACT:GOLD FLASH 5U" BLACK INSULATOR ROHS
DWG. 製圖	Hedy	SCALE 比例 參考	PART NO.
DATE 制表日	2010/06/03	UNIT 單位 MM	料號 C0591-DMCANA0BR
		PAGE 張數 1 / 1	
		REV. 版次 A	