
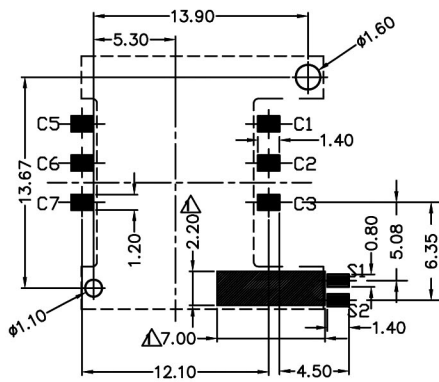
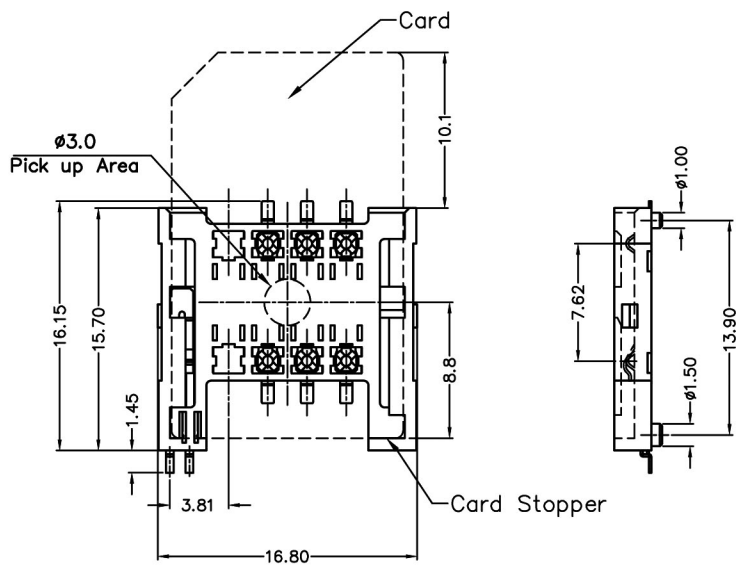


1 2 3 4 5 6 7 8


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

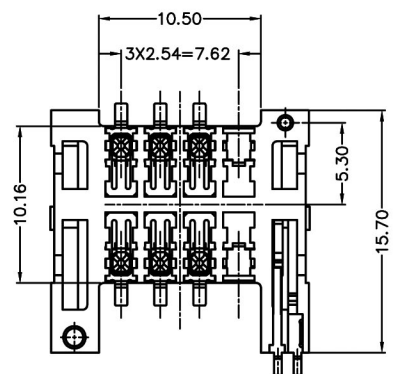

P.C.B LAYOUT(Tolerance: $\pm 0.05\text{mm}$)

△ Notes: Please do not plan to design any P.C.B line on the above shadow area, like "////"



Specification

- 1.General Characteristics :
 - . Contact Principle : Friction Technology
 - . Mounting System : SMT
 - . Durability : 10,000 Cycles Min.
- 2. Material
 - . Data Contacts Material : Phosphor Bronze
 - △. Data Contacts Plating : Gold Over Nickel
 - . Insulation Material : Thermoplastic UL 94V-0
- 3.Electrical Characteristics
 - . Card Detecting Switch State : Normally Open.
 - . Contact Resistance : 50 Milliohms Max.
 - . Insulator Resistance : >1000 Megohms/500V DC
- 4.Solderability
 - . Wave : Not Applicable
 - . Vapor Phase : 215°C, 30 Sec. Max.
 - . IR Reflow : 260°C, 15 Sec. Max.
 - . Manual Soldering : 360°C, 3 Sec. Max.
- 5.Environmental Characteristics
 - . Operating Temperature : -40°C ~ +85°C
 - . Operating Humidity : 10% ~ 95% RH
 - . Storage Temperature : -40°C to +85°C
 - . Storage Humidity : 10% ~ 95% RH
 - . RoHS Compliant

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2013/07/30	Hedy 2013/07/30
	SCALE 比例 UNIT 單位 PAGE 張數 1 / 1	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±1° SIZE. 紙張尺寸 A 4 REV. 版次 A
PART NAME 品名 SIM CARD SLIDE IN TYPE 6PIN SMT 90° ROW PITCH=12.1MM H=2.4MM W/ LOCATING PEG & W/ SWITCH GOLD FLASH REEL PACKING ROHS		PART NO. 料號 C0610-06BBBGBRR

1 2 3 4 5 6 7 8