


P.C.B LAYOUT(Tolerance: ±0.05mm)  
 △ Notes: Please do not plan to design any P.C.B line on the above shadow area, like "████"

Specification

- 1.General Characteristics :
  - . Contact Principle : Friction Technology
  - . Mounting System : SMT
  - . Durability : 10,000 Cycles Min.
2. Material
  - . Data contacts material : Phosphor Bronze
  - △. Data contacts plating : Gold Over Nickel
  - . Insulation Material : Thermoplastic UL 94V-0
- 3.Electrical Characteristics
  - . Card Detecting Switch State : Normally Open.
  - . Contact Resistance : 50 milliohms Max.
  - . Insulator Resistance : >1000Megohms/500V DC
- 4.Solderability
  - . Wave : Not Applicable
  - . Vapor Phase : 215°C, 30 Sec. Max.
  - . IR Reflow : 260°C, 15 Sec. Max.
  - . Manual Soldering : 360°C, 3 Sec. Max.
- 5.Environmental Characteristics
  - . Operating Temperature : -40°C~+85°C
  - . Operating Humidity : 10%~95% RH
  - . Storage Temperature : -40°C to +85°C
  - . Storage Humidity : 10%~95% RH
  - . RoHS Compliant

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 參考 UNIT 單位 MM	TOLERANCE 容許公差 .0 ± .00 ± ANG ±	PART NAME 品名 SIM CARD SLIDE IN TYPE 6PIN SMT 90° ROW PITCH=12.1MM H=2.4MM W/O LOCATING PEG & W/ SWITCH GOLD FLASH ROHS
DWG. 製圖 ABBY		SIZE. 紙張尺寸 A4	
DATE 制表日 2017/12/08	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C0610-06BBCGBXR

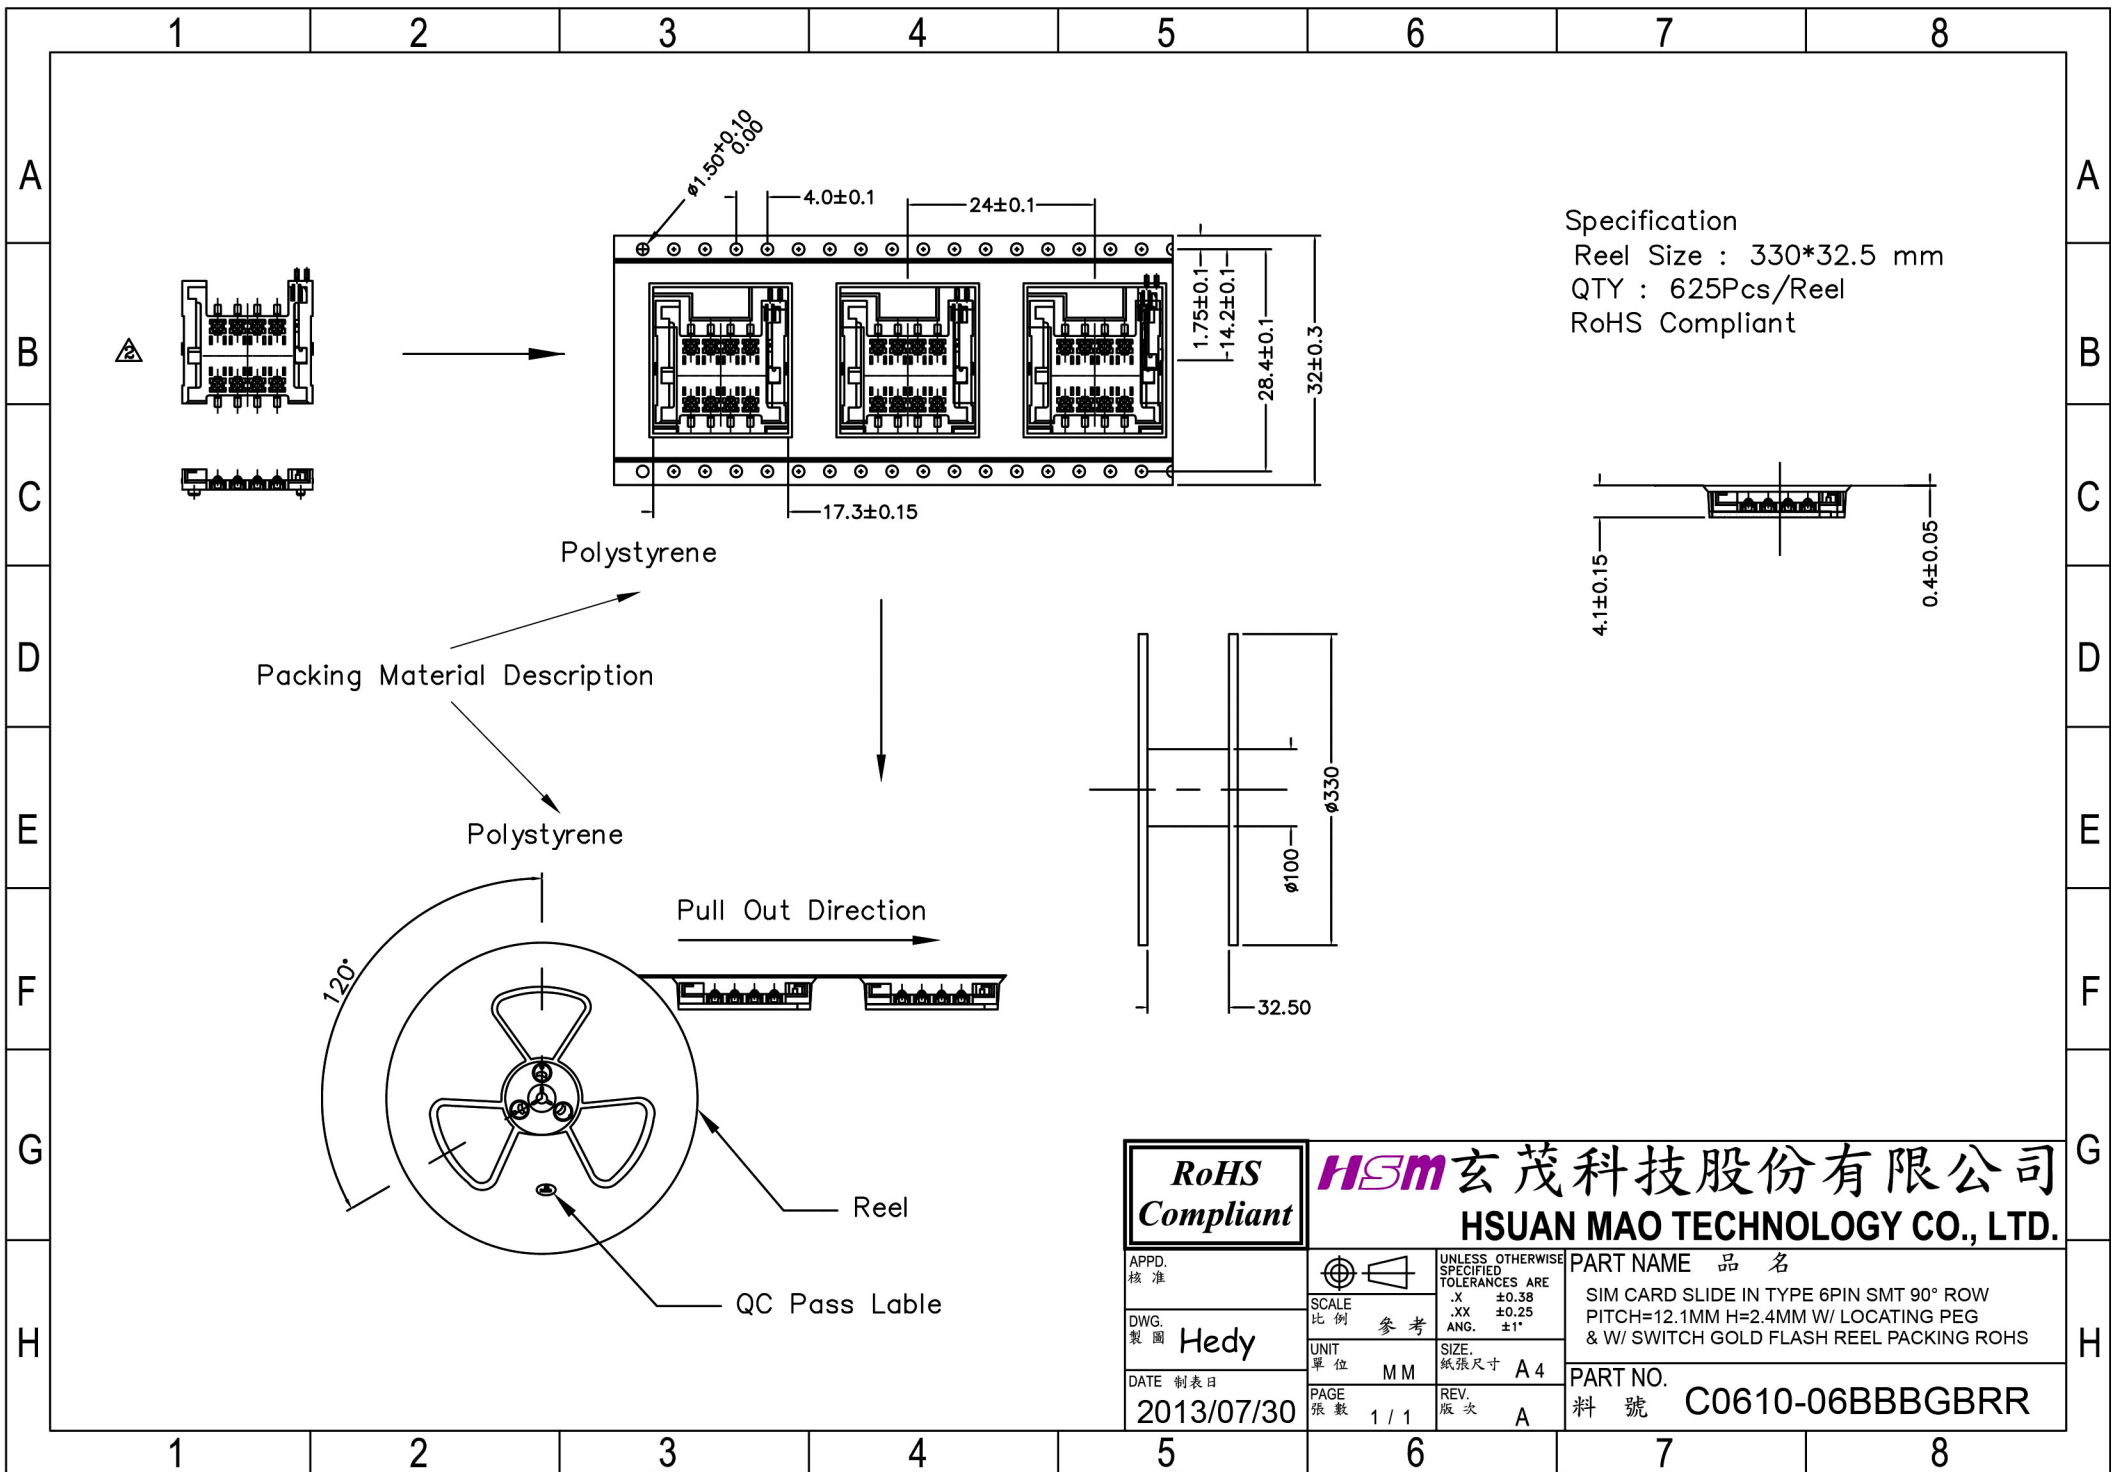

Specification  
 Reel Size : 330\*32.5 mm  
 QTY : 625Pcs/Reel  
 RoHS Compliant

Packing Material Description

Polystyrene

Pull Out Direction

Reel

QC Pass Label

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b>	
		<b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准	 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: .X ±0.38 .XX ±0.25 ANG. ±1°	PART NAME 品名	
DWG. 製圖		SIM CARD SLIDE IN TYPE 6PIN SMT 90° ROW PITCH=12.1MM H=2.4MM W/ LOCATING PEG & W/ SWITCH GOLD FLASH REEL PACKING ROHS	
DATE 制表日	SCALE 比例	UNIT 單位	PART NO.
2013/07/30	參考	MM	料號 C0610-06BBBGBRR
	PAGE 張數	REV. 版次	
	1 / 1	A	