


NOTES

***Material:**

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: PPS UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Terminal.

***Specification:**

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S for One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Processing Temp: 230°C for 30~60 Seconds MAX.;
- 7.Durability: 5000 Cycles.

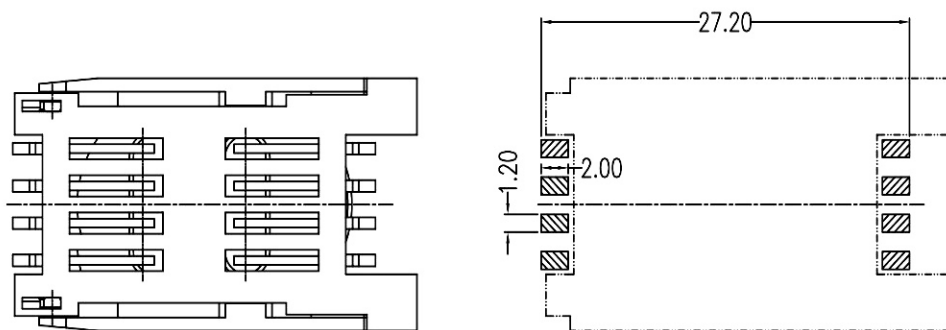

RECOMMEND P.C.B. LAYOUT
TOP VIEW

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE X ± 0.38 XX ± 0.25 XXX ± 0.20 AWG	PART NAME 品名 SIM CARD BLOCK TYPE HINGED COVER 8P H:2.3mm WITHOUT POST WITHOUT SWITCH SELECTIVE GOLD PLATING BLACK INSULATOR ROHS LOW-LEAD
DWG. 製圖 HELEN	SCALE 比例 參 考	UNIT 單位 M M	PART NO. 料 號 C0612-08DASBB0R
DATE 制表日 2010/7/22	PAGE 張數 1 OF 1	REV. 版本 A	