


Notes:  
Material: Phosphor Bronze

Physical:  
Housing: LCP UL 94V-0  
Contact: Selective Gold Flash  
Specifications:  
Voltage Current rating: 1A 50V AC  
Insulation Resistance: 1000 Mohm Min  
Contact Withstanding Voltage:  
AC 500V For 1 Minute  
Temperture Rating: -40° To +85°



<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准		TOLERANCE UNLESS OTHERWISE SPECIFIED .X±0.25 X'±.2' .XX±0.15 X'±.1' .XXX±0.10 XXX'±	PART NAME 品名 SIM CARD BLOCK W/RIGHT SWITCH 8P SMT ROW SPACING:24.6mm HEIGHT:1.4mm SELECTIVE GOLD PLATING BLACK COLOR REEL PACKING ROHS
DWG. 製圖 <b>Hedy</b>	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C0614-08DRDSBRR
DATE 制表日 2016/11/22	PAGE 張數 1 / 1	SIZE. 紙張尺寸 A 4	REV. 版次 B

Carrier Dimensions Diagram

PULL OUT DIRECTION →

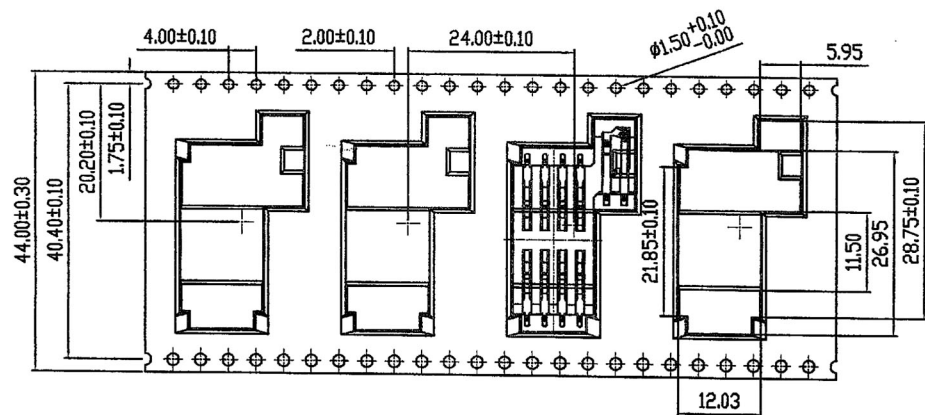

Reel Form Diagram

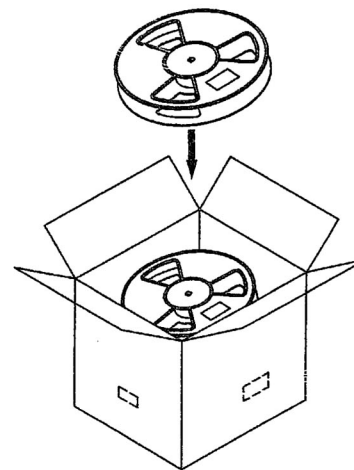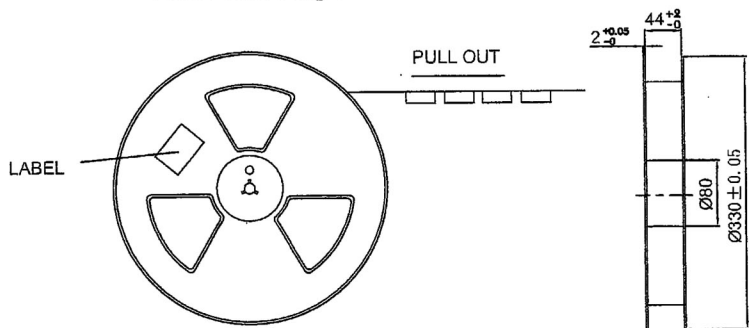

G.W.:1.20KGS

Q'ty:700 Pcs per Reel

G.W.:7.20KGS

Q'ty:4900 Pcs per carton(7 Reels set in order)

Meas:35.00L×35.00W×32.30H cm

**RoHS**  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	Hedy	DATE 制表日	2016/11/22
DWG. 製圖		PAGE 張數	1 / 1

SCALE 比例	參考
UNIT 單位	MM
PAGE 張數	1 / 1

TOLERANCE UNLESS OTHERWISE SPECIFIED	XX±0.15	XX±1
SIZE 紙張尺寸	A4	
REV. 版次	B	
PART NAME 品名	SIM CARD BLOCK W/RIGHT SWITCH 8P SMT	
	ROW SPACING:24.6mm HEIGHT:1.4mm	
	SELECTIVE GOLD PLATING BLACK COLOR	
	REEL PACKING ROHS	
PART NO.	料號 C0614-08DRDSBRR	