



NOTE:  
 1.MATERIAL:  
 INSULATOR;THERMOPLASTIC UL94V-0.  
 TERMINAL;COPPER ALLOY T=0.15mm.  
 SWITCH;COPPER ALLOY T=0.15mm.  
 SHELL;SUS T=0.15mm.  
 S/WP;SUS 10.00\*Ø0.20mm.  
 CRANK AXLE;SUS 304  
 2.PLATED:  
 CONTACT: 1u' GOOD PLATING OVERALL  
 50u' NI UNDERPLATED OVERALL.  
 SHELL: 50u' NI UNDERPLATED OVERALL.  
 3.ELECTRICAL PERFORMANCE:  
 CONTACT RESISTANCE:100 MILLIOHMS Max.  
 DIELECTRIC STRENGTH:500V AC FOR 1 MINUTE.  
 4.MECHANICAL PERFORMANCE:  
 CARD INSERT FORCE:0.5~1.2Kgf  
 CARD EJECTION FORCE:0.5~1.2kgf  
 CYCLE LIFE:10000 TIMES.

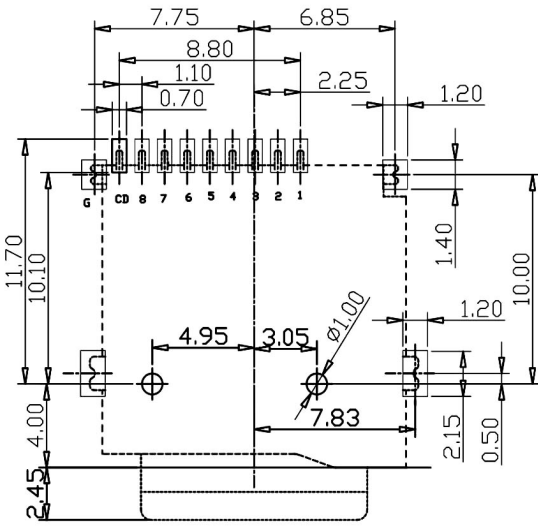

RECOMMENDED PCB LAYOUT  
 TOLERANCE:±0.05

PIN NUMBER	PIN NUMBER
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
CD	CAED DETECTION
G	GROUND



RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 T-FLASH CONNECTOR 8P PUSH-PUSH TYPE SMT TYPE STAND OFF:0mm SELECTIVE GOLD PLATING WITH LOCATING PEG BLACK COLOR REEL PACKING ROHS
DWG. 製圖 Betty	SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	SIZE. 紙張尺寸 A 4 REV. 版次 C	PART NO. 料號 C0629-08DASYBRR
DATE 制表日 2016/09/09			