


- MATERIAL
 SCREWS : M2.5 STEEL ZINC PLATED
 WIRE GUAR : PHOSPHOR BRONZE NICKEL PLATING
 HOUSING : **PA66 UL94V-0**
 SOLDER PIN : BRASS TIN PLATING
- ELECTRICAL
 RATED VOLTAGE : 300V
 RATED CURRENT : 10A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000Ω /1000V
 WITHSTANDING VOLTAGE : AC2000V/1Min
 WIRE RANGE : **20-14**AWG 2.5mm²
- MECHANICAL
 TEMP.RANGE : -40℃~+105℃
 MAX SOLDERING : +250℃, FOR 5 SEC.
 TORQUE : 0.4Nm (3.6Lb.in)
 STRIP LENGTH : 6-7mm

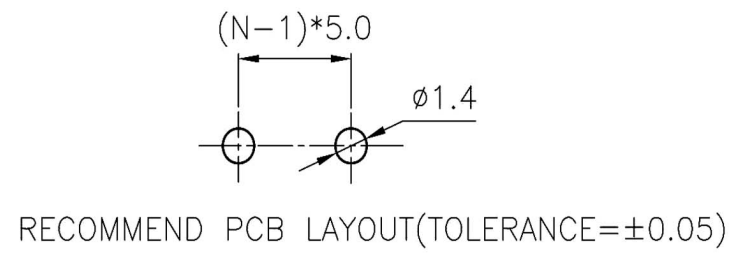

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE X ±0.60 .X ±0.38 .XX ±0.25 X ±5° .X ±3° .XX ±2°	PART NAME 品名 5.0mm TERMINAL BLOCK XXPin RIGHT ANGLE TYPE H:10mm WITH LEAF SPRING SUITABLE FOR 14~20AWG GREEN INSULATOR ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C0926-XXRRTE00R
DATE 制表日 2014/10/31	UNIT 單位 MM	SIZE 紙張尺寸 A4	
	PAGE 張數 1 OF 1	REV. 版次 A	