

P	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P
B	13.81	17.62	21.43	25.24	29.05	32.86	36.67	40.48	44.29	48.10	51.91	55.72
C	18.50	22.30	26.10	29.90	33.80	37.60	41.40	45.10	49.00	52.80	56.60	60.40
P	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
B	59.53	63.34	67.15	70.96	74.77	78.58	82.39	86.20	90.01	93.82	97.63	
C	64.20	68.00	71.90	75.72	79.52	83.22	87.12	90.92	94.72	98.52	102.42	


NOTES :

UL Standard :

1. Rating: 300V 8A
2. Insulation Withstands Voltage: AC 1600V at 1 minute
3. Using Temperature Range: -40°C~+115°C
4. Suitable Electric Wire: AWG 28~16

IEC Standard:

1. Rating: 320V 14A
2. Rate Impulse Voltage: 2500V
3. Insulation Resistance: 500MΩ or more at DC500V
4. Material Group : I
5. Pollution Degree : 2
6. Overvoltage Category: II
7. Using Temperature Range: -40°C~+120°C

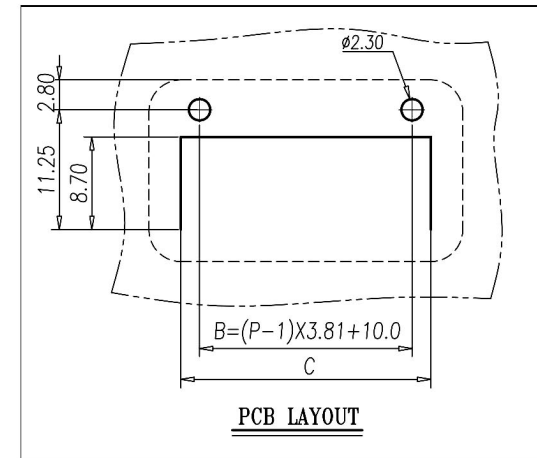

3	NUT	COPPER ALLOY	M2.5x0.45
2	SOLDER PIN	COPPER ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名 3.81mm Terminal Block Solder Pin H=11.0mm XXPin Straight Type With Screw Hole Suitable For 16~28Awg Tin Plating Green Color ROHS
DWG. 製圖	SCALE 比例 參考	SIZE. 紙張尺寸 A4	
DATE 制表日	UNIT 單位 M M	REV. 版次 B	PART NO. 料號
2018/07/31	PAGE 張數 1 OF 1		C0950-XXSA4TYE0R

A

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8