

### Features:

- 2 ~ 10, 12, 15 circuits available
- Pin Material: Tin-plated phosphor bronze
- Standard Color: Nature



### Specification:

- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C


### Ordering Information

Part No.	Insulation material	Feature
W6351-XXPTSNW0R	UL 94V-2	Without Polarizing
W6351-XXPTSNW1R	UL 94V-0	Without Polarizing

W6351-09PTSNW(0,1)R


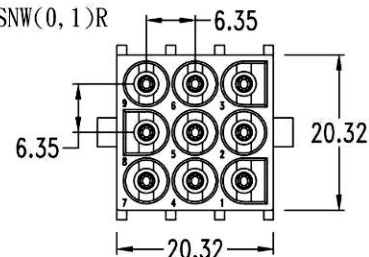


0.25 (Cut off Tab)

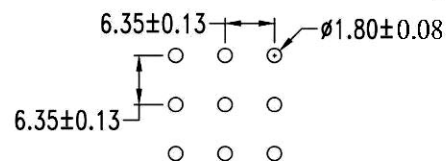


P. C. board layout

W6351-12PTSNW(0,1)R

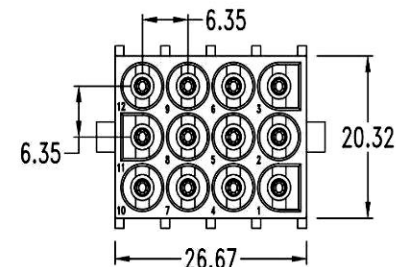

0.25 (Cut off Tab)

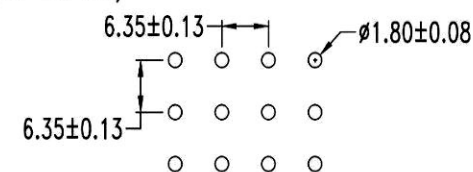

P. C. board layout

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准 BETTY  
DWG.  
製圖 KAREN  
DATE 制表日  
2013/04/19

TOLERANCE  
.000 ± 0.08  
SCALE  
比例 參考  
UNIT  
單位 MM  
PAGE  
張數 1 OF 1

PART NAME 品名  
6.35mm WAFER STRAIGHT(FEMALE)3\*XP  
W/O POLARIZING FEATURE WHITE ROHS  
PART NO.  
料號 W6351-XXPTSNW(0,1)R