
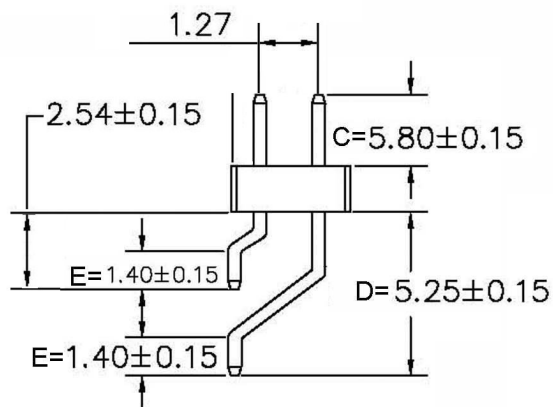


RECOMMENDED P.C.B LAYOUT

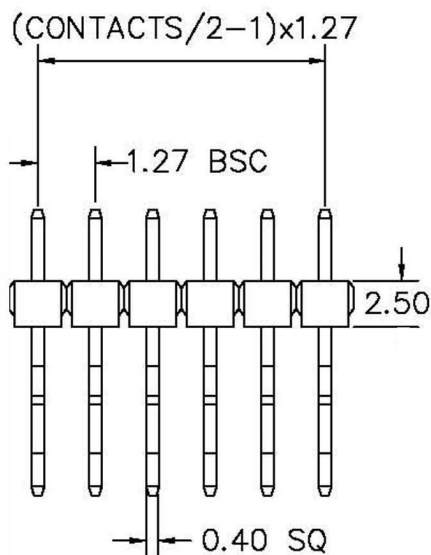

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 DIELECTRIC STRENGTH : 1000 VAC MIN
 DURABILITY : 100 CYCLES
 RETENTION FORCE : 700g MIN

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE 容許公差 .0 ±0.38 .00 ±0.25 ANG. ±5°	PART NAME 品名 1.27mm PIN HEADER DUAL ROW HORIZONTAL SMT TYPE H=3.4mm XXP (C=5.8mm D=5.25mm E=1.4mm) ROHS LOW-LEAD
DWG. 製圖 Yumi	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. 料號 C1276-XXBDXATXR
DATE 製表日 2010/09/16	PAGE 張數 1 OF 1	REV. 版次 A	