


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP Or Equivalent material

Recommended P.C.Board Layout
 (Tolerance: ±0.05)

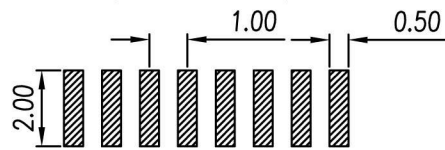

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE GENERAL TOLERANCE	PART NAME 品名
DWG. 製圖		SCALE 比例	PART NO. 料號
DATE 制表日 2012/02/10	Hedy	UNIT 單位	
		PAGE 張數	
		REV. 版次	

1.0mm PIN HEADER SINGLE ROW HORIZONTAL SMT TYPE
 H=1.0mm(W=1.5mm) 1XXX GOLD FLASH PLATING
 MATERIAL: LCP UL94-V0(C=1.5mm D=2.6mm E:1.5mm)
 WITHOUT LOCATING PEG TUBE PACKING ROHS