


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 300VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 LCP

RECOMMENDED P.C.B LAYOUT
 (Tolerance: ±0.05)

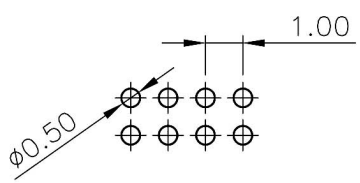

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE GENERAL TOLERANCE	PART NAME 品名
DWG. 製圖	Betty	X" ± 5"	1.0mm PIN HEADER DUAL ROWS STRAIGHT TYPE
DATE 制表日	2015/04/02	X" ± 2"	H=1.2mm 2XXXP FULL GOLD PLATING
		X" ± 1"	C=2.2mm D=2.2mm ROHS
		XXX ± 0.5"	PART NO.
		SCALE 比例 參考	料號 C1821-XXBSGAS0R
		UNIT 單位 M M	
		PAGE 張數 1 OF 1	
		REV. 版次 A	