
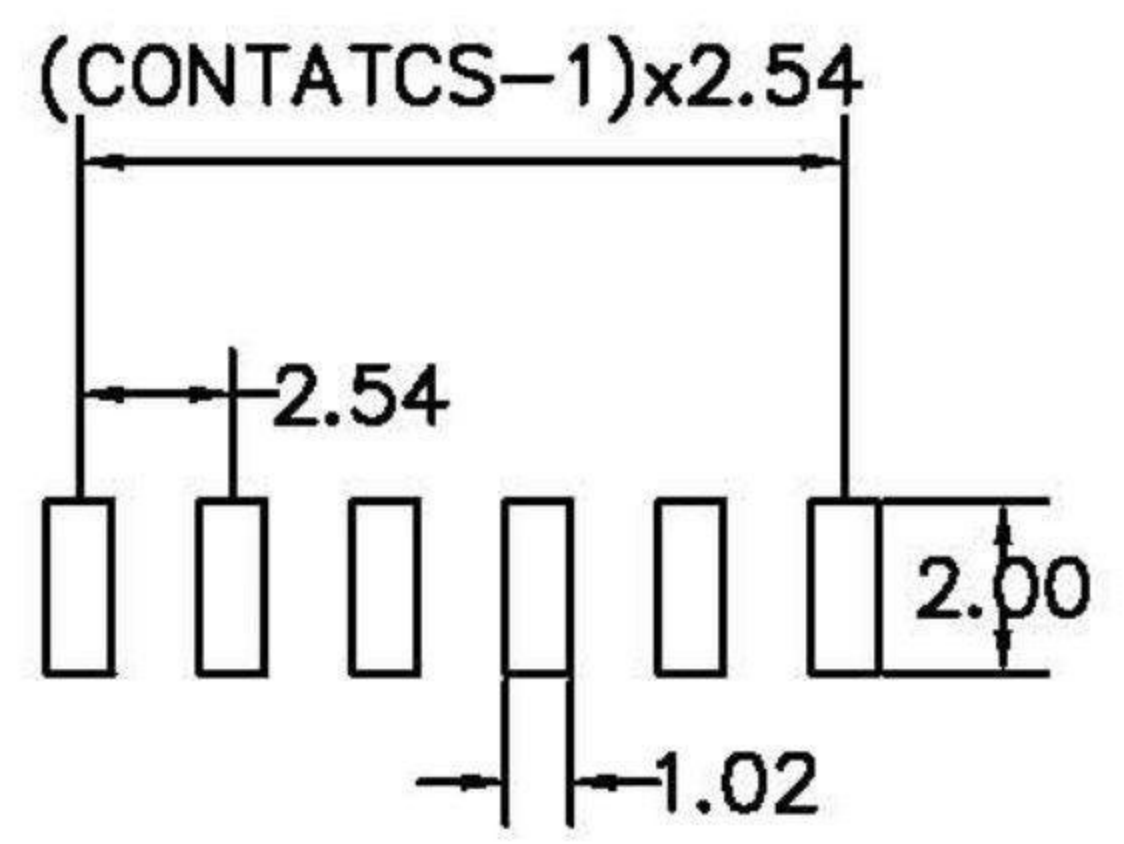




1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

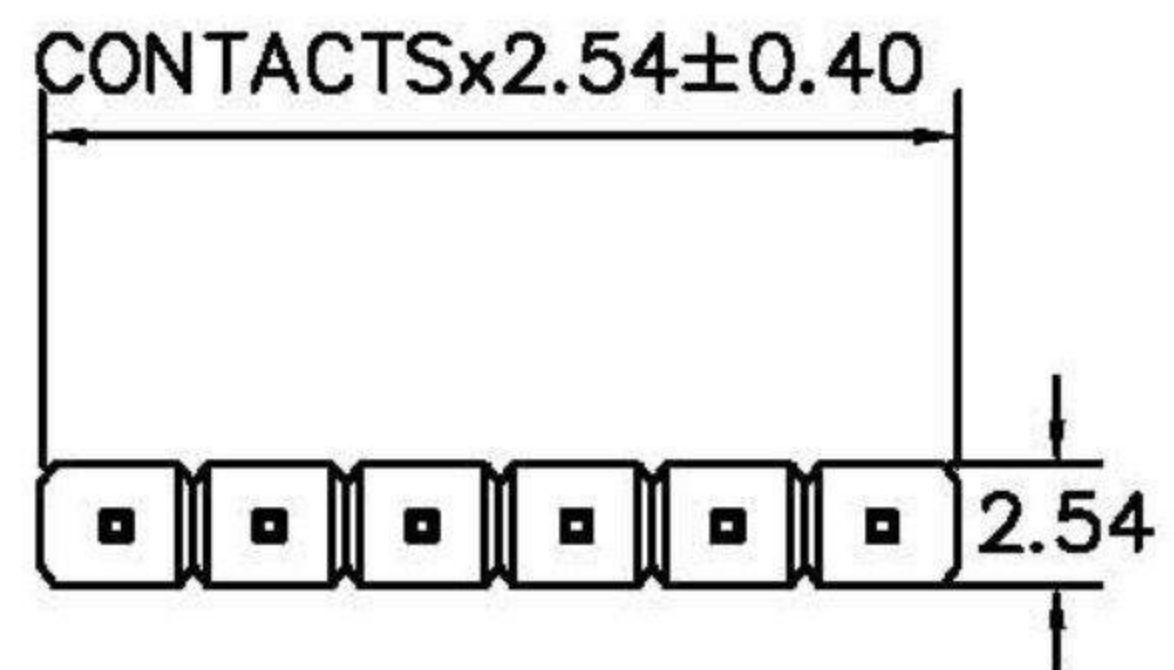

RECOMMENDED P.C.B LAYOUT

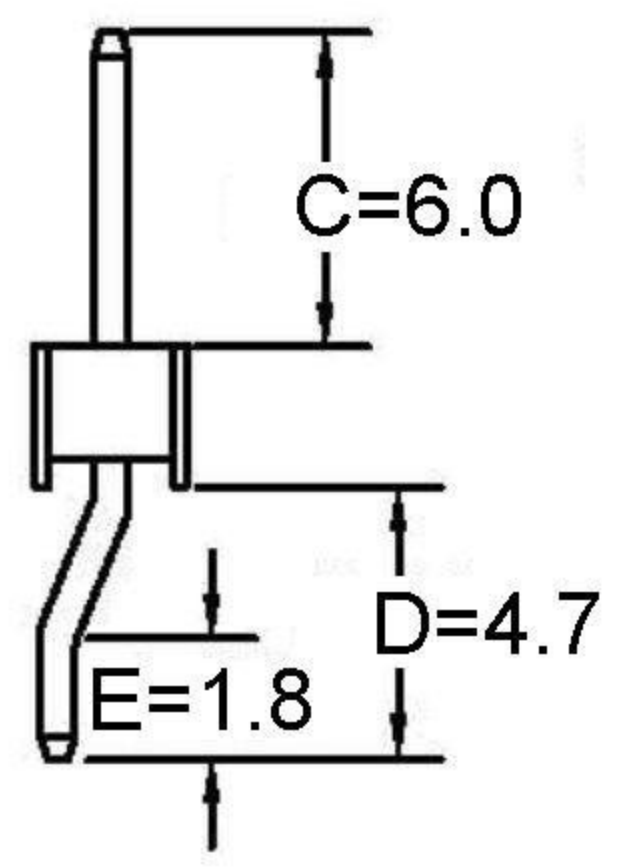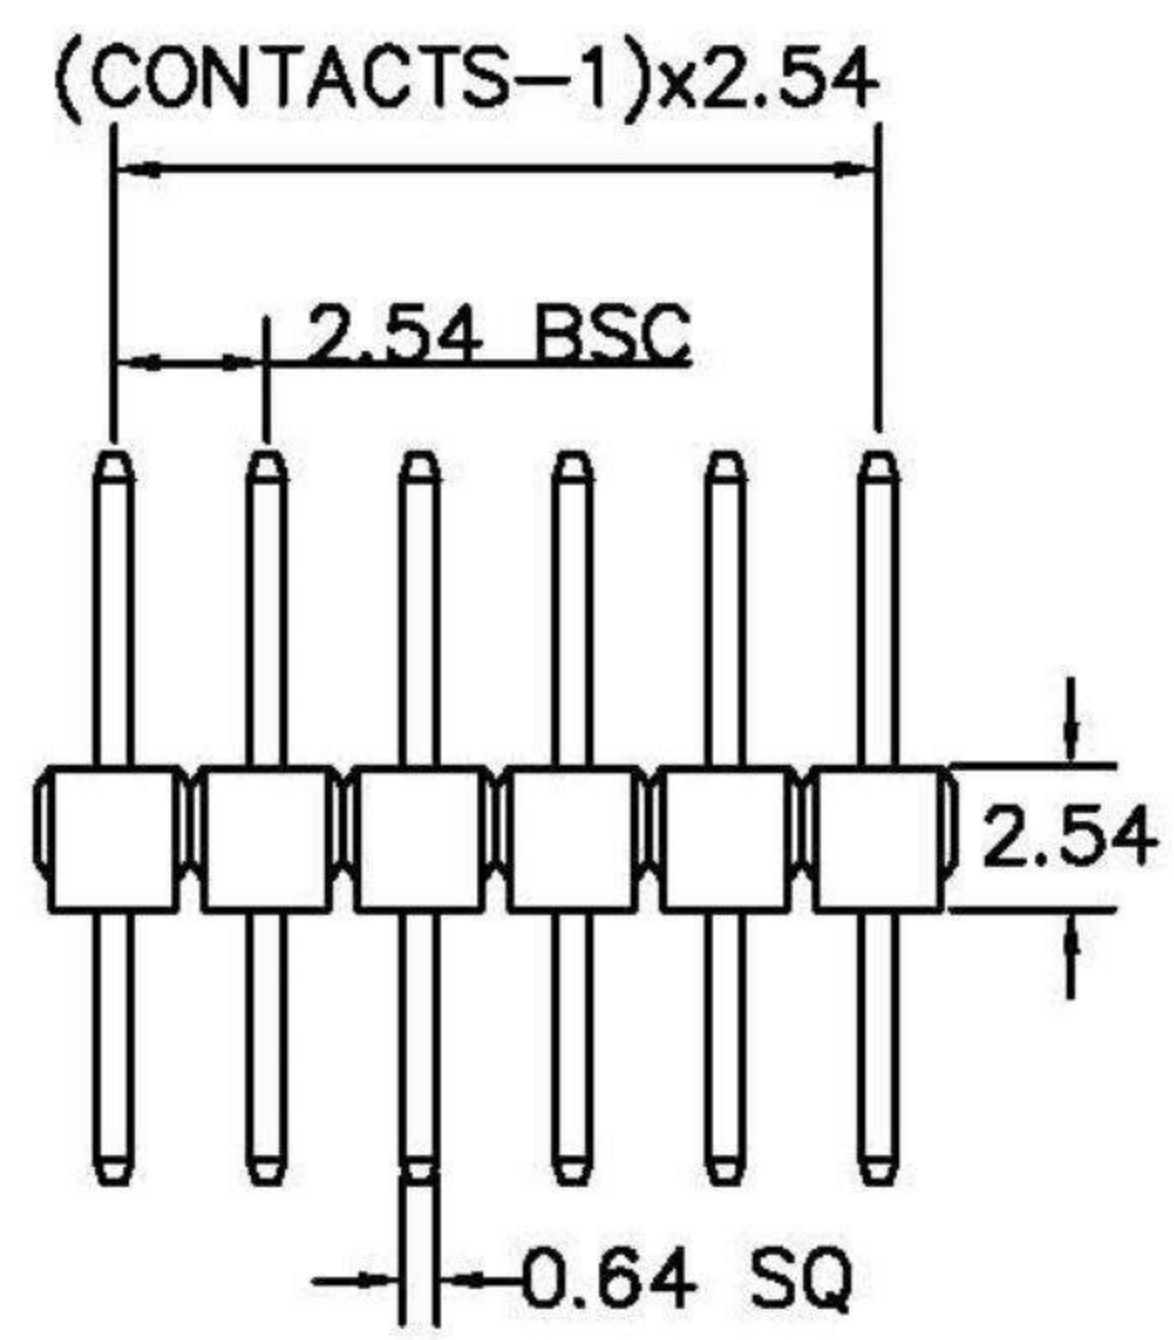

| CONTACTS | |
|----------|------|
| 1X3 | 1X22 |
| 1X4 | 1X23 |
| 1X5 | 1X24 |
| 1X6 | 1X25 |
| 1X7 | 1X26 |
| 1X8 | 1X27 |
| 1X9 | 1X28 |
| 1X10 | 1X29 |
| 1X11 | 1X30 |
| 1X12 | 1X31 |
| 1X13 | 1X32 |
| 1X14 | 1X33 |
| 1X15 | 1X34 |
| 1X16 | 1X35 |
| 1X17 | 1X36 |
| 1X18 | 1X37 |
| 1X19 | 1X38 |
| 1X20 | 1X39 |
| 1X21 | 1X40 |

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE: AC 1000V RMS

| | | | |
|---------------------|---------------------------|--|---|
| RoHS Compliant | | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| APPD. 核准 HELEN | | TOLERANCE 容許公差 .0±0.38 .00±0.25 ANG=±5° | PART NAME 品名 2.54mm PIN HEADER SINGLE ROW HORIZONTAL SMT TYPE H=2.54mm(W=2.5mm) 1XXXP MATERIAL: NYLON 6T UL94-V0 (C=6.0mm D=4.7mm E=1.8mm) ROHS |
| DWG. 製圖 ABBY | SCALE 比例 參考 UNIT 單位 MM | SIZE 紙張尺寸 A4 | PART NO. 料號 C2103-XXADXEAXR |
| DATE 制表日 2014/08/11 | PAGE 張數 1 OF 1 | REV. 版次 A | |

1 2 3 4 5 6 7 8