
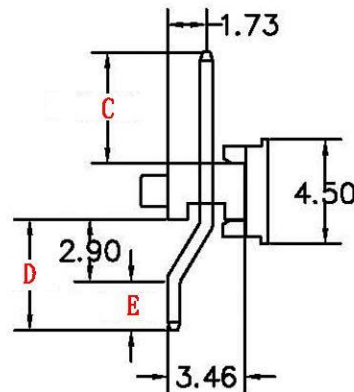


RECOMMENDED P.C.B LAYOUT

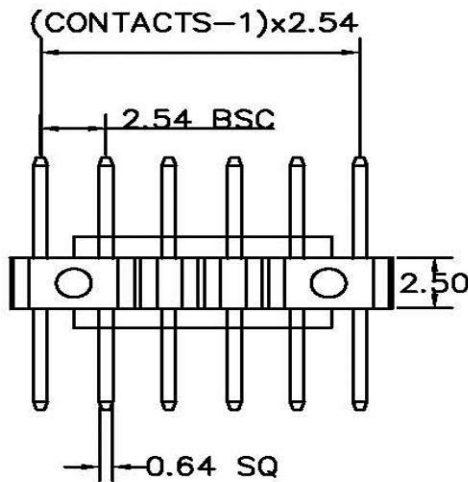

C=8.25mm D=5.17mm E=1.80mm

CONTACTS	
1X3	1X22
1X4	1X23
1X5	1X24
1X6	1X25
1X7	1X26
1X8	1X27
1X9	1X28
1X10	1X29
1X11	1X30
1X12	1X31
1X13	1X32
1X14	1X33
1X15	1X34
1X16	1X35
1X17	1X36
1X18	1X37
1X19	1X38
1X20	1X39
1X21	1X40

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 HELEN DATE 制表日 2009/4/29	SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.38 .00 ± 0.25 ANG. ± 5° SIZE 紙張尺寸 A 4 REV. 版本 A	PART NAME 品名 2.54mm PIN HEADER SINGLE ROW HORIZONTAL SMT TYPE H=2.5mm (W=3.46mm) 1X??P GOLD FLASH PLATING (C=8.25mm D=5.17mm E=1.8mm) WITH LOCATING PEG ROHS PART NO. 料號 C2104-XXAGIAYXR