


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material

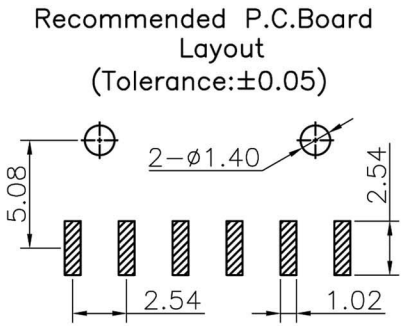

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		SCALE 比例	2.54mm PIN HEADER SINGLE ROW SIDE ENTRY SMT TYPE H=2.5mm 1XXXP GOLD FLASH PLATING (C=6.0mm D=4.7mm E=1.8mm) MATERIAL: NYLON 6T WITH LOCATING PEGS HALOGEN FREE ROHS
DATE 制表日		UNIT 單位	PART NO.
2022/08/10	MM	料號	C2107-XXIGADYXH
	PAGE 張數	REV. 版次	
	1 / 1	B	