



Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:Polyester,UL 94V-0
 High temperature Nylon or
 Equivalent Material

Dim.D	NOTE
5.00mm	02pins
6.00mm	03~08pins
8.50mm	09~40pins

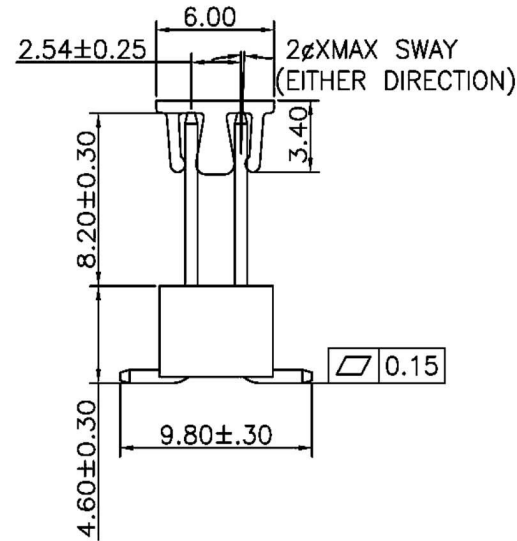

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

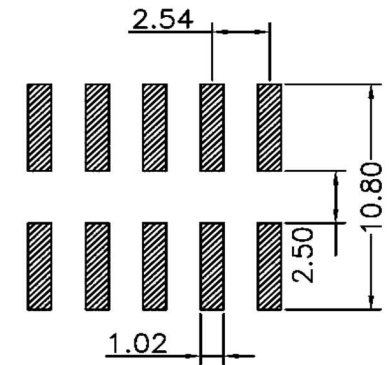

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		GENERAL TOLERANCE X'±5.0" X±0.30 X'±3.0" X±0.25 .XX±2.0" .XX±0.15 .XXX±1.0" .XXX±0.10	PART NAME 品名 2.54mm PIN HEADER DUAL ROW 2XXXP SMT TYPE H=4.3mm (C=8.2mm D=9.8mm E=4.6mm) ROHS
DWG. 製圖 Betty	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2243-XXBDXATXR
DATE 制表日 2013/04/29	UNIT 單位 M M	REV. 版次 B	
	PAGE 張數 1 OF 1		

PIN 0.64 SQ