

C2802-XXBSXH00R

C2802-XXASXH00R

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical








Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

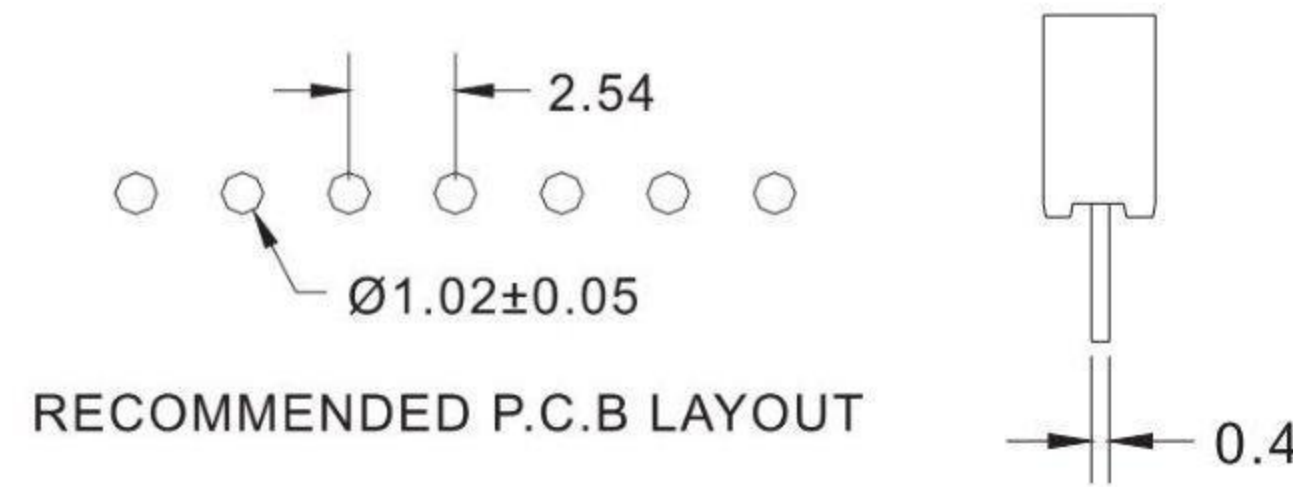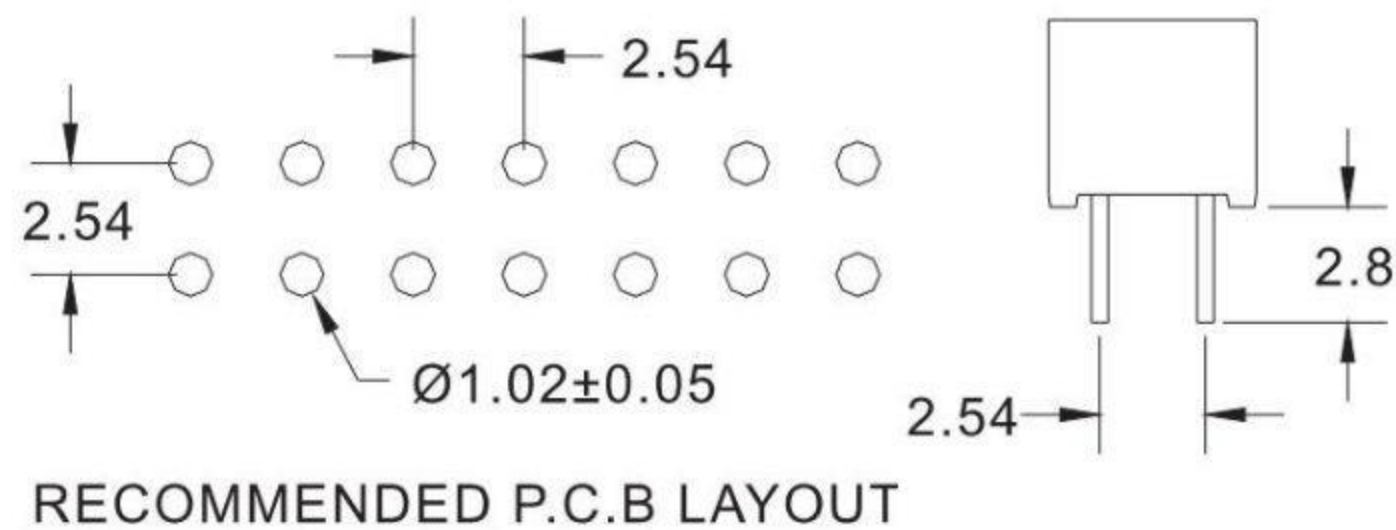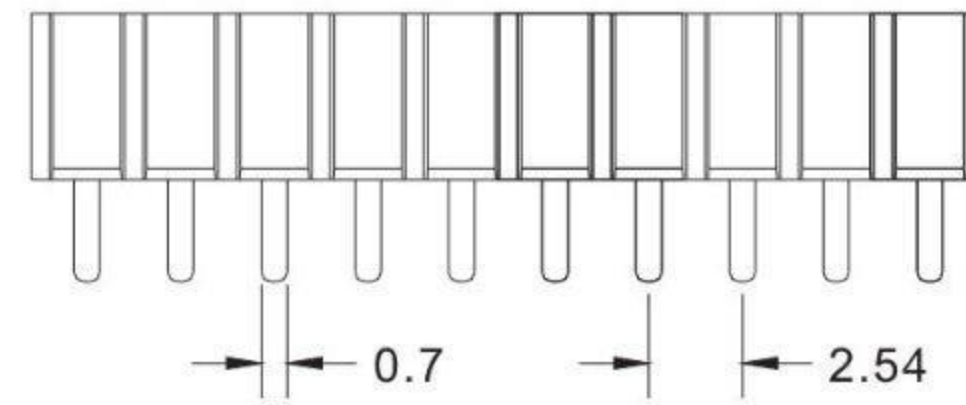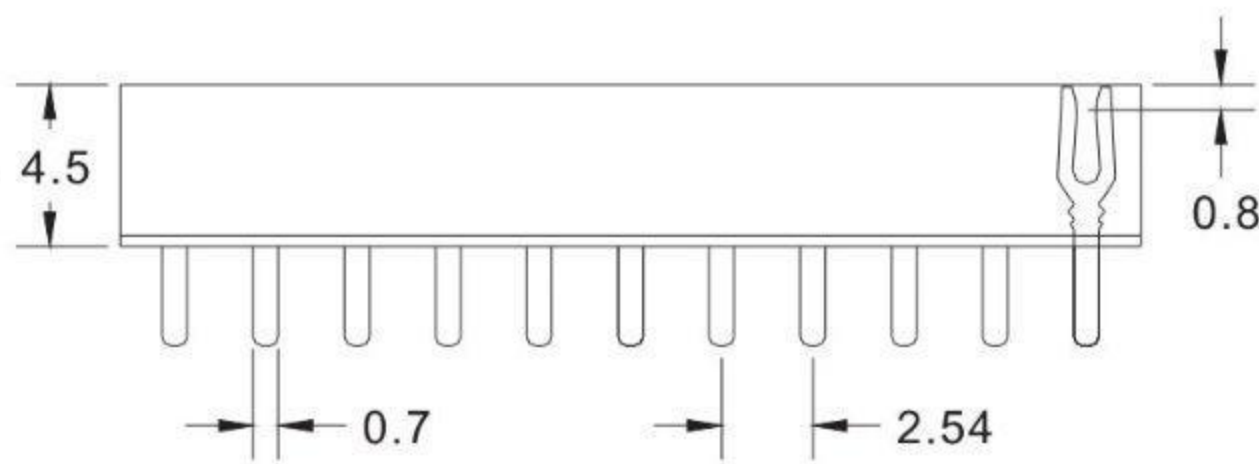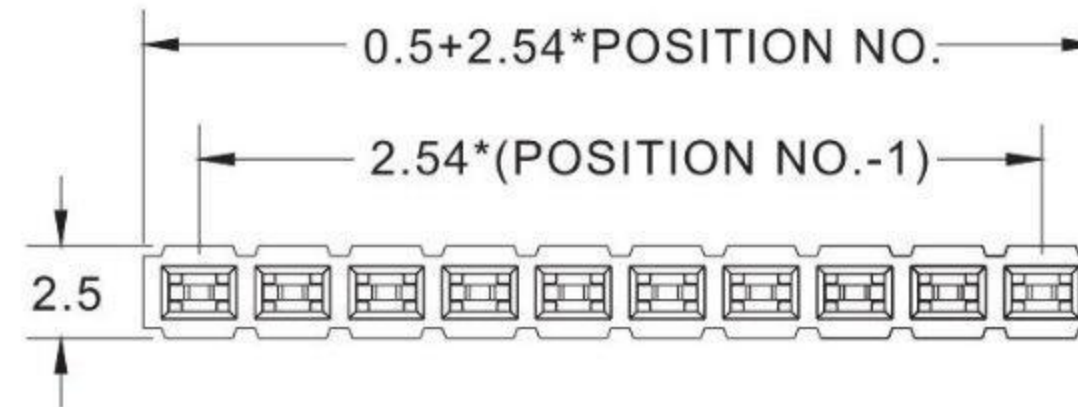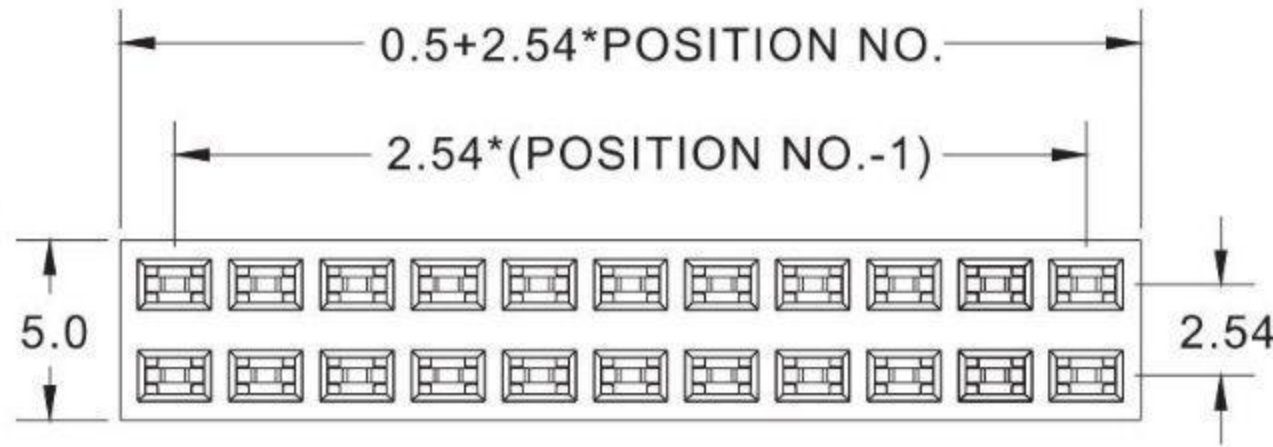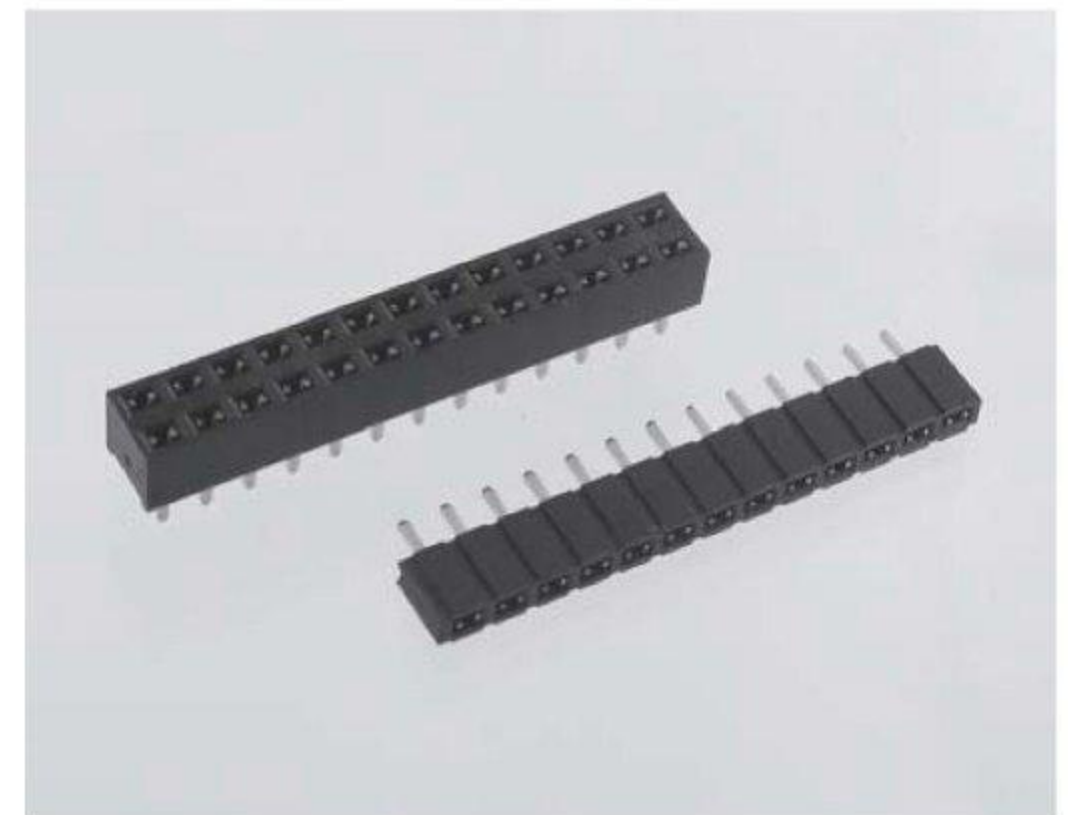

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准: BETTY	SCALE 比例: 参考	TOLERANCE 容許公差: .0 ± 0.3 .00 ± 0.2 ANG. ± 3°	PART NAME 品名: 2.54mm FEMALE HEADER SINGLE ROW H:4.5mm 1*XXP or 2*XXP STRAIGHT TYPE ROHS
DWG. 製圖: KAREN		UNIT 單位: MM	SIZE 紙張尺寸: A4
DATE 制表日: 2014/08/11	PAGE 張數: 1 OF 1	REV. 版本: A	PART NO. 料號: C2802-XXXSXH00R