




SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Brass

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

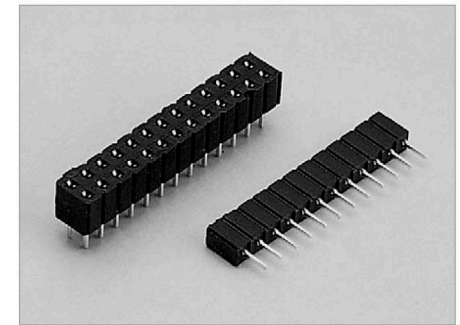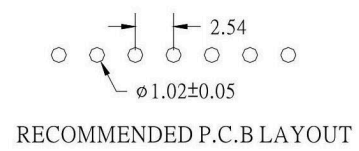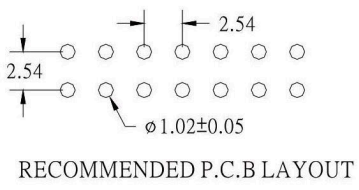

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.											
APPD. 核准	BETTY	<table border="1"> <tr><th colspan="2">GENERAL TOLERANCE</th></tr> <tr><td>Y'±</td><td>Y ±</td></tr> <tr><td>Y'±</td><td>Y ± 0.30</td></tr> <tr><td>XX±</td><td>XX ±</td></tr> <tr><td>.XXX±</td><td>.XXX ±</td></tr> </table>	GENERAL TOLERANCE		Y'±	Y ±	Y'±	Y ± 0.30	XX±	XX ±	.XXX±	.XXX ±	PART NAME 品名
GENERAL TOLERANCE													
Y'±	Y ±												
Y'±	Y ± 0.30												
XX±	XX ±												
.XXX±	.XXX ±												
DWG. 製圖	BETTY	SCALE 比例 參考	2.54mm WAVY FEMALE HEADER DUAL ROW H:5.2mm XXP STRAIGHT TYPE GOLD FLASH PLATING ROHS										
DATE 制表日	2011/10/18	UNIT 單位 M M	PART NO.										
		PAGE 張數 1 OF 1	料號 C2803-XXXSGH00R										
		REV. 版次 B											