

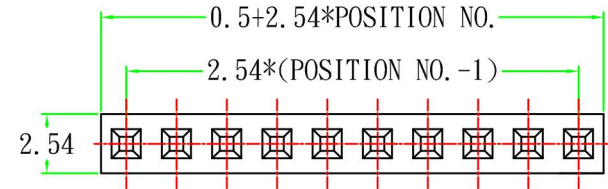
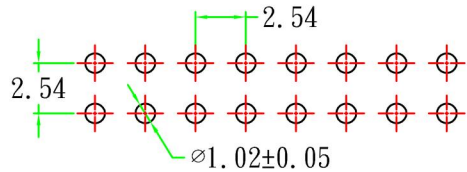



C2804-XXBSXH00R

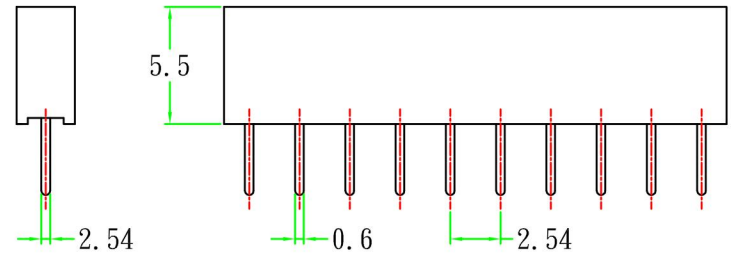

C2804-XXASXH00R

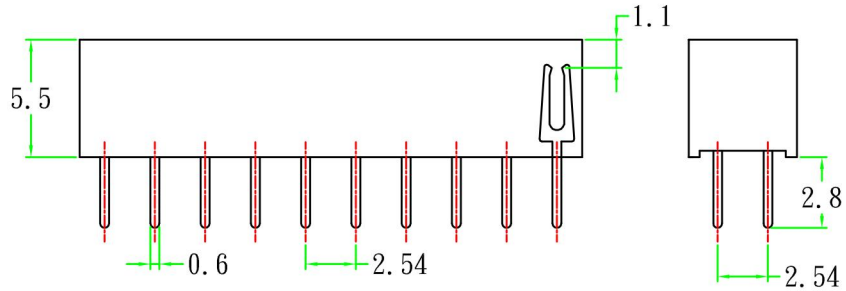

RECOMMENDED P. C. B LAYOUT



RECOMMENDED P. C. B LAYOUT

SPECIFICATIONS

Material

Insulator:PBT, glass reinforced, rated UL94V-0

Contact:Phosphor Bronze

Electrical

Current Rating:1 Amp

Contact Resistance:30M Ω Max.

Insulation Resistance:3000M Ω Min.

Dielectric Withstanding Voltage:500V AC for 1 minute

Operating Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C



HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.		TOLERANCE .0 \pm 0.25 .00 \pm ANG. \pm	PART NAME 品名 2.54mm FEMALE HEADER (SINGLE OR DUAL)ROW H:5.5mm (1X?? OR 2X??P)STRAIGHT TYPE ROHS
DWG. HELEN	SCALE 参考	SIZE. A 4	PART NO. 料 號 C2804-XXXSXH00R
DATE 2015/11/03	UNIT M M PAGE 1 OF 1	REV. B	