


1 2 3 4 5 6 7 8


A




B

0.50 REF.


C

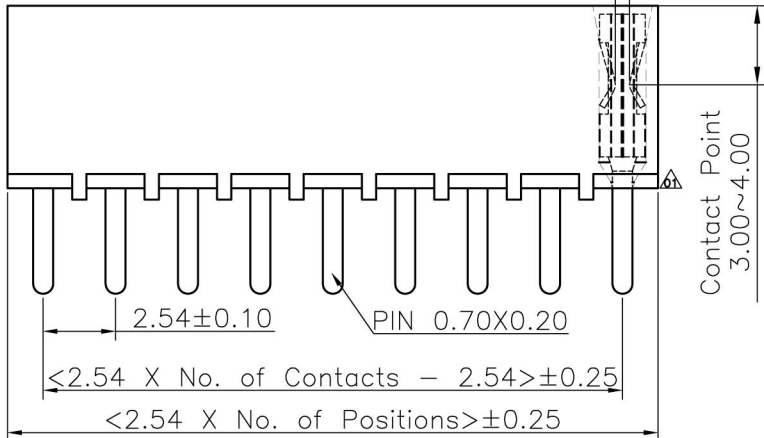

D

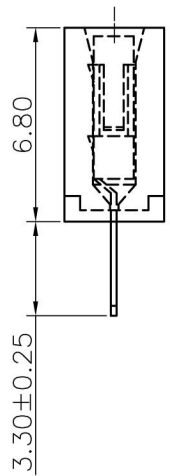


E

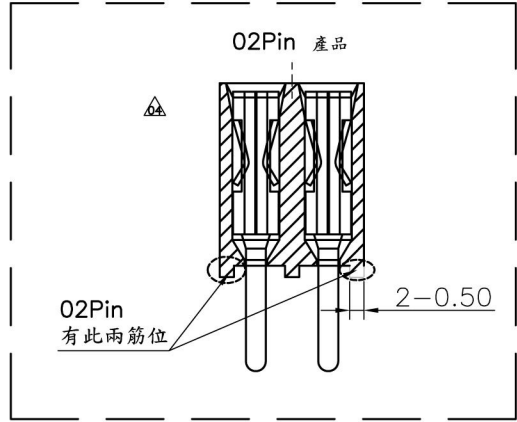

F

Recommended P.C.Board Layout
(Tolerance:±0.05)

G

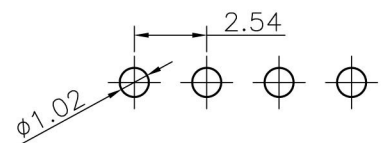

H

Specifications

Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:Polyester,UL 94V-0
 PBT or Equivalent Material

A

B

C

D

E

F

G

H

RoHS Compliant		HSM 玄茂科技股份有限公司		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	Hedy	 TOLERANCE GENERAL TOLERANCE X ⁺ ±5.0 ⁺ X±0.30 X ⁻ ±3.0 ⁻ X±0.25 .XX±2.0 ⁺ .XX±0.15 .XXX±1.0 ⁺ .XXX±0.10	PART NAME 品名		
DWG. 製圖	Hedy		2.54mm FEMALE HEADER SINGLE ROW H:6.8 1XXXP STRAIGHT TYPE TIN or GOLD FLASH PLATING ROHS		
DATE 制表日	2013/05/02	UNIT 單位	MM	SIZE 紙張尺寸	A 4
PAGE 張數	1 / 1	REV. 版次	A	PART NO. 料號 C2805-XXASXL00R	

1 2 3 4 5 6 7 8