
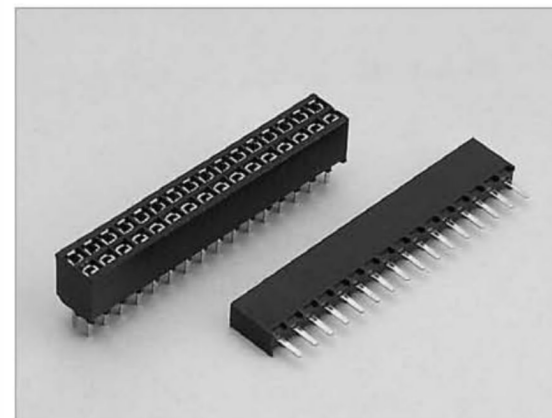


1 2 3 4 5 6 7 8

A

A

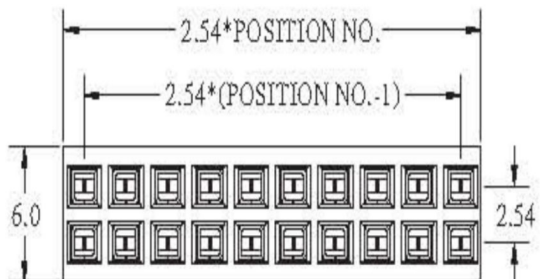

B


B

C

C

D

D

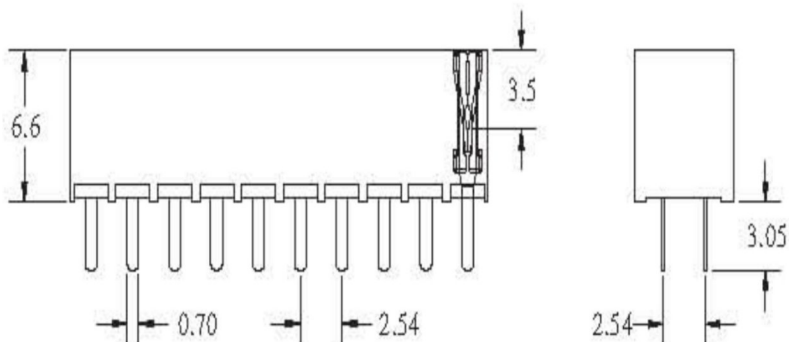

E


E

F

F

G

G



RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

H

H

1 2 3 4 5 6 7 8

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H:6.6mm 2XXXP STRAIGHT TYPE LOW LEAD
DWG. 製圖 Yumi	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NO. 料號 C2805-XXBSXH00R
DATE 製表日 2009/11/17	UNIT 單位 M M	PAGE 張數 1 OF 1	REV. 次 A