

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 PBT

Recommended P.C.B Layout

(Tolerance: ±0.05)

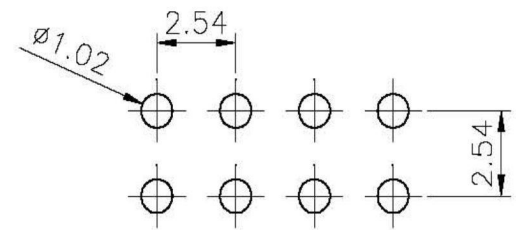

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE X' ± S' K ± 0.30 .X' ± S' .X ± 0.25 .XX' ± 1' .XX ± 0.15 .XXX' ± 1' .XXX ± 0.10	PART NAME 品名 2.54mm FEMALE HEADER DUAL ROW H:6.8mm 2XXP STRAIGHT TYPE LOW-LEAD
DWG. 製圖 Yumi		UNIT 單位 MM	PART NO. 料號 C2805-XXBSXL00R
DATE 制表日 2010/06/03	PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4	REV. 版次 A